

# PT40R-1003-IOL-H1141


## Pressure Transmitter – With 2 Switching Outputs and IO-Link



### Features

- Ceramic measuring cell
- Compact and robust design
- Excellent EMC properties
- Pressure range 0...40 bar rel.
- 18...33 V DC
- NO/NC contact, 2 × PNP/NPN outputs, IO-Link
- Process connection 1/4"-18 NPT male thread
- Plug-in device, M12 × 1

### Wiring diagram

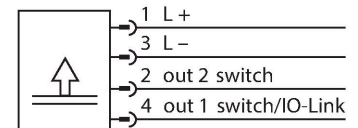

### Functional principle

The pressure sensors in the PT...-1000 product series operate with a ceramic measuring cell in various pressure ranges of up to -1...60 bar in 2-, 3- or even 4-wire technology. Depending on the sensor variant, the processed signal is available as an analog output signal (4...20 mA, 0...10 V, 0...5 V, 1...6 V, ratiometric) or as a digital IO-Link process parameter. The IO-Link sensor variants also have two independently configurable switching outputs. In addition to the standard variants, there are special sensors for uses such as ATEX areas or for oxygen applications. A wide range of process connections and electrical connections offer a high degree of flexibility in a wide range of applications.

### Technical data

|   |  |
|---|--|
| Type                                      | PT40R-1003-IOL-H1141                   |
| ID  | 100030994                              |
| <b>Pressure range</b>                     |  |
| Pressure type                             | Relative pressure                      |
| Pressure range                            | 0...40 bar                             |
|   | 0...580.15 psi                         |
|   | 0...4 MPa                              |
| Admissible overpressure                   | ≤ 120 bar                              |
| Burst pressure                            | ≥ 120 bar                              |
| Response time                             | < 2 ms, typ. 1 ms                      |
| Long-term stability                       | 0.25 % FS, according to IEC EN 60770-1 |
| <b>Power supply</b>                       |  |
| Operating voltage                         | 18...33 VDC                            |
|   | In IO-Link mode                        |
|   | 9...33 VDC                             |
|   | In SIO mode                            |
| Short-circuit/reverse polarity protection | yes / yes                              |
| Protection type and class                 | IP67 / III                             |
| Insulation voltage                        | 500 VDC                                |
| <b>Outputs</b>                            |  |
| Output 1                                  | Switching output or IO-Link mode       |
| Output 2                                  | Switching output                       |
| <b>Switching output</b>                   |  |
| Communication protocol                    | IO-Link                                |
| Output function                           | NO/NC, PNP/NPN                         |
| Switching current                         | ≤ 100 mA                               |

## Technical data

|  |   |
|--|---|
| Switching frequency                            | ≤ 100 Hz  |
| Switching point distance                       | ≥ 0.5 %   |
| Switch point:                                  | (Min. + 0.005 × range)...100 % of full scale  |
| Release point(s)                               | Min. up to (SP - 0.005 × range)   |
| Switching cycles                               | ≥ 100 mil.  |
| Switch point SP1                               | Factory setting: 25 % of measuring range end value  |
| Release point rP1                              | Factory setting: 23 % of measuring range end value  |
| Switching point SP2                            | Factory setting: 75 % of measuring range end value  |
| Release point rP2                              | Factory setting: 73 % of measuring range end value  |
| Resolution                                     | <± 0.1 % FS   |
| Accuracy LHR                                   | ±0.3 % FS (typical; max. ±0.5 % FS)   |
| <b>IO-Link</b>                                 |   |
| IO-Link specification                          | V 1.1   |
| Programming                                    | FDT/DTM   |
| Transmission physics                           | corresponds to 3-wire physics (PHY2)  |
| Transmission rate                              | COM 2/38.4 kbps   |
| Frame type                                     | 2.2   |
| <b>Temperature behaviour</b>                   |   |
| Medium temperature                             | -40...+125 °C   |
| Temperature coefficient                        | ± 0.2 % of full scale/10 K  |
| <b>Environmental conditions</b>                |   |
| Ambient temperature                            | -30...+85 °C  |
| Storage temperature                            | -50...+100 °C   |
| Vibration resistance                           | 20 g, 15...2000 Hz, 15...25 Hz with amplitude ± 15 mm, 1 octave/minute in all 3 directions, 50 continuous loads, acc. to IEC 68-2-6 |
| Shock resistance                               | 100 g, 11 ms, half sinusoidal curve, all 6 directions, free fall from 1 m onto concrete (6x) acc. to IEC 68-2-27                    |
| <b>Mechanical data</b>                         |   |
| Housing material                               | Stainless-steel/Plastic, 1.4404 (AISI 316L)/polyarylamide 50 % GF UL 94 V-0   |
| Pressure connection material                   | Stainless steel 1.4404 (AISI 316L)  |
| Pressure transducer material                   | Ceramic Al <sub>2</sub> O <sub>3</sub>  |
| Sealing material                               | FPM spez.   |
| Process connection                             | 1/4" NPT-18 male thread   |
| Wrench size pressure connection / coupling nut | 24  |
| Electrical connection                          | Connector, M12 × 1  |

## Technical data

|   |  |
|---|--|
| Max. tightening torque of housing nut           | 20 Nm  |
| <b>Reference conditions acc. to IEC 61298-1</b> |  |
| Temperature                                     | 15...+25 °C  |
| Atmospheric pressure                            | 860...1060 hPa abs.  |
| Humidity  | 45...75 % rel.   |
| Auxiliary power                                 | 24 VDC   |
| <b>Programming</b>                              |  |
| Programming options                             | Offset; filter; switching points; hysteresis/filter function, NC/NO; min./max. pressure values, pressure peak counter; operating hours counter |
| <b>Tests/approvals</b>                          |  |
| Approvals                                       | cULus  |
| UL registration number                          | E302799  |
| MTTF  | 1200 years acc. to SN 29500 (Ed. 99) 40 °C   |

## Accessories

| Dimension drawing | Type           | ID      |   |
|-------------------|----------------|---------|---|
|                   | USB-2-IOL-0002 | 6825482 | IO-Link Master with integrated USB port |

