



Inductive Sensor Monitoring Kit for Power Clamps NI1.5-VEP-2AP6-0.185-FS4.4X3/S304

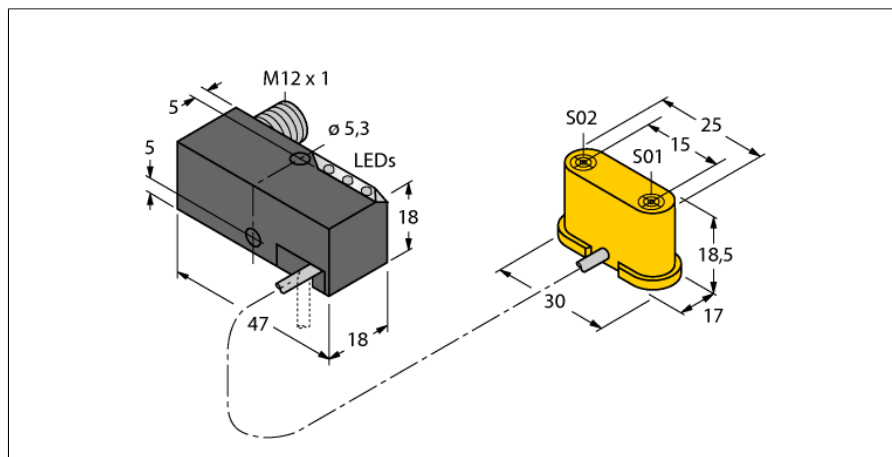

- VEP power block with two connected sensors and LEDs
- M12 x 1 male connector
- Plastic, PBT-GF20-V0
- Resistant to magnetic fields (weld-resistant), for DC and AC fields up to 100 mT
- 2 x NO contact, PNP output
- DC 4-wire, 10...30 VDC

Wiring Diagram

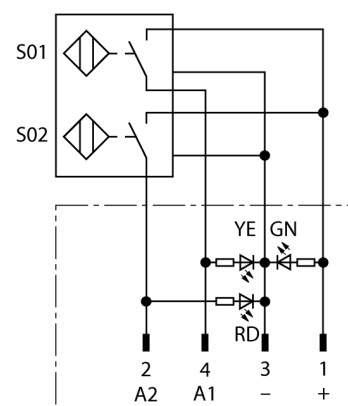

Functional principle

TURCK offers special monitoring kits, consisting of two miniature sensors, as a convenient solution for "Open/Closed" detection on pneumatic power clamps. This product line provides almost unlimited combination possibilities, comprising four different power blocks and over 40 different modular sensor types.

Type	NI1.5-VEP-2AP6-0.185-FS4.4X3/S304
ID	1650123
Special version	S304 corresponds to: 2 x Ni./Bi...-AP(N)6/S34. Function for DeviceNet. Defined length at connector FS4.4/FS4.4K or FSF5.5/FSF5.5K (with PE connection) or FS4.4X3. Example for order : Ni2-Q6.5-AP6-0.1-FSF4.4X3/ S304

General data	
Rated switching distance S_n	1.5 mm
Mounting conditions	Non-flush
Secured operating distance	$\leq (0.81 \times S_n)$ mm
Correction factors	St37 = 1; Al = 0.3; stainless steel = 0.7; Ms = 0.4
Repeat accuracy	≤ 2 % of full scale
Temperature drift	$\leq \pm 10$ %
Hysteresis	3...15 %

Electrical data	
Operating voltage	10...30 VDC
Residual ripple	≤ 10 % U_{ss}
DC rated operational current	≤ 150 mA
Residual current	≤ 0.1 mA
Isolation test voltage	≤ 0.5 kV
Short-circuit protection	yes/ Cyclic
Voltage drop at I_L	≤ 1.8 V
Output function	4-wire, NO contact, PNP
Switching frequency	0.03 kHz

Mechanical data	
Design	Monitoring Kit for Spanners, VEP
Dimensions	47 x 18 x 18 mm
Housing material	Metal
Active area material	Plastic, PBT-GF30-V0
Electrical connection	Connector, M12 × 1
Cable quality	Ø 2 mm, Gray, Lif9Y-11Y, PUR, 0.185 m
Core cross-section	3 x 0.08 mm ²
Litz wire	40x0.05mm
Environmental conditions	
Ambient temperature	-25...+70 °C
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP67
MTTF	2283 years acc. to SN 29500 (Ed. 99) 40 °C
Power-on indication	
Power-on indication	LED, Green
Switching state	2 × LEDs, Yellow/red