

SM31EPD Photoelectric Sensor – Opposed Mode Sensor (Emitter)

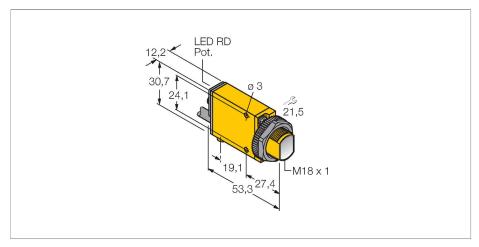

Features

- Cable, PVC, 2 m
- ■Protection class IP67
- Operating voltage: 10...30 VDC

Wiring diagram




Technical data

Туре	SM31EPD
ID no.	3026537
Optical data	
Function	Opposed mode sensor
Operating mode	Emitter
Light type	IR
Wavelength	650 nm
Range	0300 mm
Electrical data	
Operating voltage	1030 VDC
Residual ripple	< 10 % U _{ss}
No-load current	≤ 25 mA
Readiness delay	≤ 100 ms
Response time typical	< 1 ms
Setting option	Potentiometer
Mechanical data	
Design	Rectangular with thread, Mini Beam
Dimensions	Ø 18 x 53.3 x 12.3 x 30.7 mm
Housing material	Plastic, Thermoplastic material, Yellow
Lens	plastic, Acrylic
Electrical connection	Cable, 2 m, PVC
Number of cores	2
Core cross-section	0.5 mm ²
Ambient temperature	-20+70 °C
Protection class	IP67
Special features	Clear object detection Encapsulated

Functional principle

Opposed mode sensors consist of an emitter and receiver. They are installed opposite each other so that the light from the emitter is aimed directly at the receiver. When an object interrupts or weakens the light beam, the sensor switches. Opposed mode sensors are the most reliable photoelectric sensors for detection of opaque targets. An excellent contrast between light and dark conditions and an extremly high excess gain are typical of this sensing mode, thus allowing operation over larger distances and under difficult conditions.

Excess gain curve Excess gain in relation to the distance






3012558

Technical data

Excess gain indication	LED
Tests/approvals	
MTTF	853 years acc. to SN 29500 (Ed. 99) 40 °C
Approvals	CE, cURus, CSA

Accessories

SMB18A 3033200 Mounting bracket, rectangular, stainless steel, for sensors with 18 mm thread

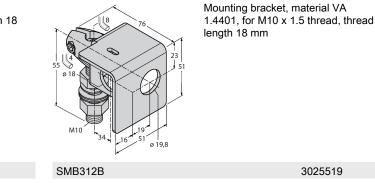

SMB18AFAM10

