


QS30ARX

Photoelectric Sensor – Opposed Mode Sensor (Emitter/Receiver)

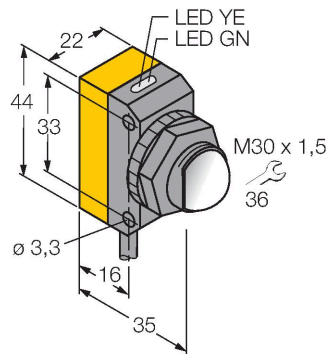


Technical data

Type	QS30ARX
ID no.	3071560
Optical data	
Function	Opposed mode sensor
Operating mode	Receiver
Wavelength	875 nm
Range	0...213000 mm
Electrical data	
Operating voltage	10...30 VDC
Residual ripple	< 10 % U _{ss}
DC rated operational current	≤ 100 mA
No-load current	≤ 22 mA
Short-circuit protection	yes
Reverse polarity protection	yes
Output function	NO contact, light operation, PNP/NPN
Switching frequency	≤ 16 Hz
Readiness delay	≤ 100 ms
Response time typical	< 5 ms
Mechanical data	
Design	Rectangular with thread, QS30
Dimensions	Ø 30 x 35 x 22 x 49 mm
Housing material	Plastic, Thermoplastic material, Yellow
Lens	plastic, Zeonex
Electrical connection	Cable, 2 m, PVC
Number of cores	5
Core cross-section	0.5 mm ²

Features

- Cable, PVC, 2 m
- Protection class IP67
- LED all-round visible
- Selectable operating frequency, protection against crosstalk
- 4-segment bargraph
- Operating voltage: 10...30 VDC
- Switching output, bipolar, light operation

Wiring diagram

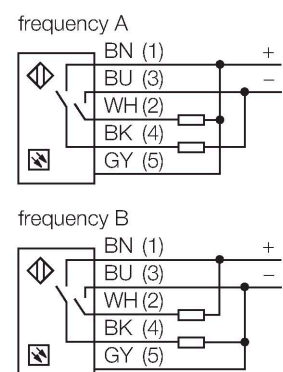


Functional principle

Opposed mode sensors consist of an emitter and receiver. They are installed opposite to each other so that the light from the emitter is aimed directly at the receiver. When an object interrupts or weakens the light beam, the sensor switches. Large distance operation is possible due to an excellent light/dark contrast and an extremely high excess gain.

Excess gain curve
Excess gain in relation to the distance

Technical data

Ambient temperature	-20...+70 °C
Protection class	IP67
Special features	Encapsulated
Power-on indication	LED, Green
Switching state	LED, Yellow
Error indication	LED, green, Flashing
Excess gain indication	Bargraph, red, flashing
Tests/approvals	
MTTF	293 years acc. to SN 29500 (Ed. 99) 40 °C
Approvals	CE

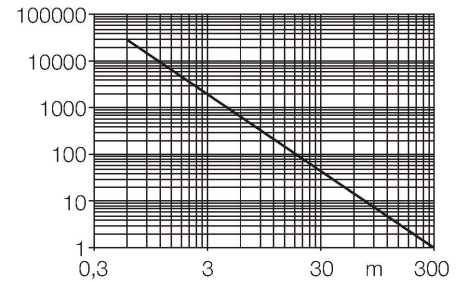


Accessories

SMBQS30Y

3002811


Protective housing, stainless steel, for
QS30 series



SMBQS30YL

3072741


Protective housing with safety glass panel, stainless steel, for QS30 series



SMB30A

3032723


Mounting bracket, rectangular,
stainless steel, for sensors with 30mm
thread



SMBQS30L

3002809


Mounting bracket, stainless steel, for
QS30 series



SMB30MM

3027162

Mounting bracket, rectangular, stainless steel, for sensors with 30 mm thread, wide holes for accurate alignment



SMB30SC

3052521

Mounting bracket, PBT black, for
sensors with 30 mm thread, rotatable

