


SM2A31RF


Photoelectric Sensor – Opposed Mode Sensor (Emitter/Receiver)

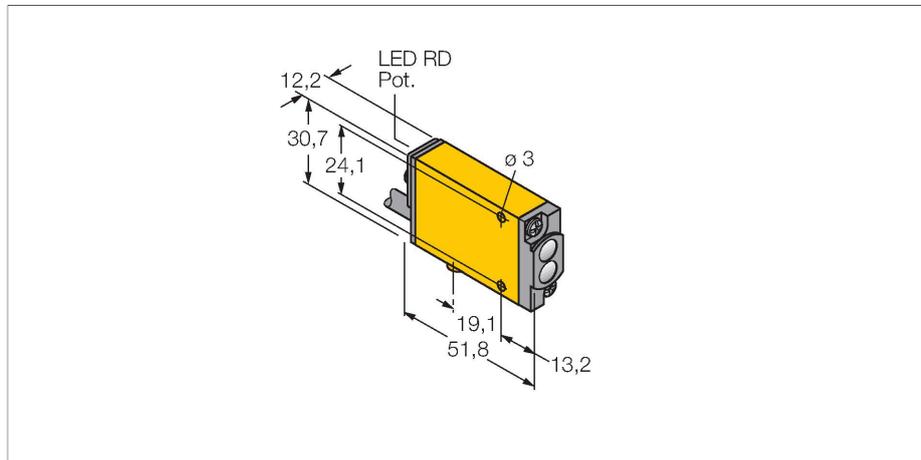

Features

- Cable, PVC, 2 m
- Protection class IP67
- Sensitivity adjustable via potentiometer
- Alignment indicator
- Operating voltage: 24...240 VAC
- Switching output, bipolar
- Light/dark operation

Wiring diagram




Technical data

Type	SM2A31RF
ID no.	3027896
Optical data	
Function	Opposed mode sensor (receiver)
Electrical data	
Operating voltage	24...240 VAC
Output function	Relay output
Mechanical data	
Design	Rectangular with thread, Mini Beam
Housing material	Plastic, PBT, Yellow
Lens	plastic, Acrylic
Electrical connection	Cable
Ambient temperature	-20...+70 °C
Protection class	IP67
Tests/approvals	
MTTF	777 years acc. to SN 29500 (Ed. 99) 40 °C
Approvals	CE, cURus, CSA

Functional principle

Opposed mode sensors consist of an emitter and receiver. They are installed opposite each other so that the light from the emitter is aimed directly at the receiver. When an object interrupts or weakens the light beam, the sensor switches. Opposed mode sensors are the most reliable photoelectric sensors for detection of opaque targets. An excellent contrast between light and dark conditions and an extremely high excess gain are typical of this sensing mode, thus allowing operation over larger distances and under difficult conditions.


Excess gain curve
Excess gain in relation to the distance

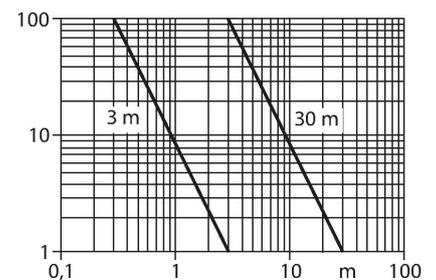

Accessories

SMB18A


3033200



Mounting bracket, rectangular, stainless steel, for sensors with 18 mm thread

SMB18AFAM10


3012558



Mounting bracket, material VA 1.4401, for M10 x 1.5 thread, thread length 18 mm

SMB18SF


3052519



Mounting bracket, PBT black, for sensors with 18 mm thread, rotatable

SMB312B


3025519



Mounting bracket, stainless steel, for MINI-BEAM NAMUR

SMB3018SC

3053952



Mounting bracket, PTB black, for sensors with 18 mm thread