


T30AW3R W/30 Photoelectric Sensor – Opposed Mode Sensor (Receiver)

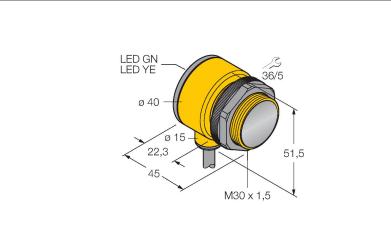


Technical data

Туре	T30AW3R W/30
ID no.	3033945
Optical data	
Function	Opposed mode sensor
Operating mode	Receiver
Range	060000 mm
Electrical data	
Operating voltage	20250 VAC
AC rated operational current	≤ 200 mA
Output function	Light operation, Relay output
Switching frequency	≤ 40 Hz
Readiness delay	≤ 100 ms
Response time typical	< 16 ms
Mechanical data	
Design	Rectangular with thread, T30
Dimensions	Ø 30 x 45 x 40 x 51.5 mm
Housing material	Plastic, Thermoplastic material
Lens	plastic, Acrylic
Electrical connection	Cable, 9 m, PVC
Electrical connection Number of cores	Cable, 9 m, PVC 3
Number of cores	3
Number of cores Core cross-section	3 0.5 mm ²
Number of cores Core cross-section Ambient temperature	3 0.5 mm ² -40+70 °C
Number of cores Core cross-section Ambient temperature Protection class	3 0.5 mm ² -40+70 °C IP69 Encapsulated

Features

Cable, 2 m Protection class IP67 Ambient temperature: -40...+70 °C


Wiring diagram



Functional principle

Opposed mode sensors consist of an emitter and receiver. They are installed opposite each other so that the light from the emitter is aimed directly at the receiver. When an object interrupts or weakens the light beam, the sensor switches. Opposed mode sensors are the most reliable photoelectric sensors for detection of opaque targets. An excellent contrast between light and dark conditions and an extremly high excess gain are typical of this sensing mode, thus allowing operation over larger distances and under difficult conditions. Excess gain curve

Excess gain in relation to the distance





Technical data

Excess gain indication	LED
Tests/approvals	
Approvals	CE, UL, CSA

Accessories

M10

