

TM18AP6RQ5 Photoelectric Sensor – Opposed Mode Sensor (Receiver)

Technical data


Туре	TM18AP6RQ5
ID no.	3042055
Optical data	
Function	Opposed mode sensor
Operating mode	Receiver
Range	020000 mm
Electrical data	
Operating voltage	1030 VDC
No-load current	≤ 25 mA
Short-circuit protection	yes / Cyclic
Reverse polarity protection	yes
Output function	NO contact, light operation, PNP
Switching frequency	≤ 440 Hz
Readiness delay	≤ 100 ms
Response time typical	< 1.5 ms
Mechanical data	
Design	Rectangular with thread, TM18
Dimensions	Ø 18 x 30 x 30 x 41 mm
Housing material	Metal, Zinc Die-Cast with Nickel-Plating
Lens	plastic, Polycarbonate
Electrical connection	Cable with connector, M12 × 1, 0.15 m, PVC
Number of cores	4
Core cross-section	0.5 mm ²
Ambient temperature	-40+70 °C
Protection class	IP67 IP69
Special features	Encapsulated Wash down
Power-on indication	LED, Green
Switching state	LED, Yellow
Error indication	LED, green, Flashing
Excess gain indication	LED
Alarm display	LED yellow Flashing
Tests/approvals	
Approvals	CE, UL



Features

- Cable with male end M12 × 1, 4-pin, PUR, 150 mm
- Protection class IP67
- Ambient temperature: -40 °C...+70 °C
- Metal housing
- Operating voltage: 10...30 VDC
- PNP switching output, light operation

Wiring diagram




Functional principle


Opposed mode sensors consist of an emitter and receiver. They are installed opposite each other so that the light from the emitter is aimed directly at the receiver. When an object interrupts or weakens the light beam, the sensor switches. Opposed mode sensors are the most reliable photoelectric sensors for detection of opaque targets. An excellent contrast between light and dark conditions and an extremly high excess gain are typical of this sensing mode, thus allowing operation over larger distances and under difficult conditions. Excess gain curve


Excess gain in relation to the distance





Accessories

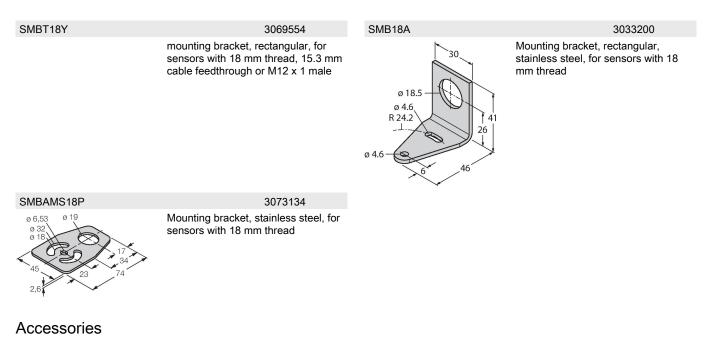

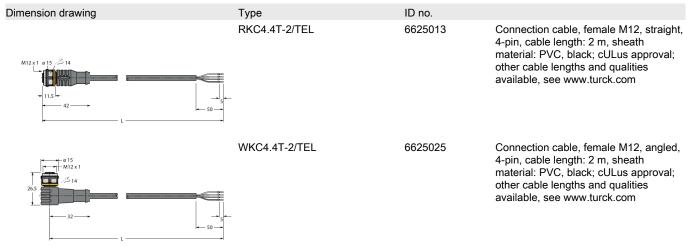

TM18AP6RQ5 06-05-2021 00-11 | Technical modifications reserved