


T306E W/30


Photoelectric Sensor – Opposed Mode Sensor (Emitter)

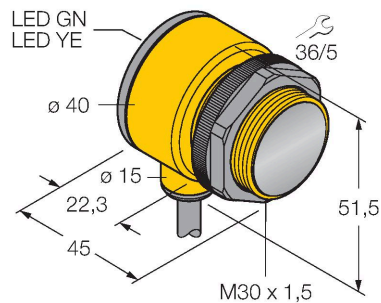

Features

- Cable, 2 m
- Protection class IP67
- Ambient temperature: -40...+70 °C
- Operating voltage: 10...30 VDC

Wiring diagram




Technical data

Type	T306E W/30
ID no.	3033933
Optical data	
Function	Opposed mode sensor
Operating mode	Emitter
Light type	IR
Wavelength	950 nm
Range	0...60000 mm
Electrical data	
Operating voltage	10...30 VDC
Residual ripple	< 10 % U _{ss}
Readiness delay	≤ 100 ms
Response time typical	< 3 ms
Mechanical data	
Design	Rectangular with thread, T30
Dimensions	Ø 30 x 45 x 40 x 51.5 mm
Housing material	Plastic, Thermoplastic material
Lens	plastic, Acrylic
Electrical connection	Cable, 9 m, PVC
Number of cores	2
Core cross-section	0.5 mm ²
Ambient temperature	-40...+70 °C
Protection class	IP69
Special features	Encapsulated Wash down
Power-on indication	LED, Green
Excess gain indication	LED

Functional principle

Opposed mode sensors consist of an emitter and receiver. They are installed opposite to each other so that the light from the emitter is aimed directly at the receiver. When an object interrupts or weakens the light beam, the sensor switches. Opposed mode sensors are the most reliable photoelectric sensors for detection of opaque targets. The excellent light/dark contrast and the high excess gain allow operation over larger distances and under difficult conditions.

Excess gain curve
Excess gain in relation to the distance

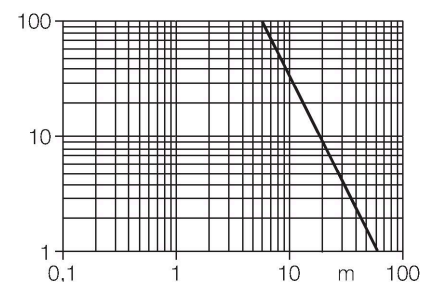


Technical data

Tests/approvals	
Approvals	CE, UL, CSA

Accessories


SMB1815SF	3053279
-----------	---------

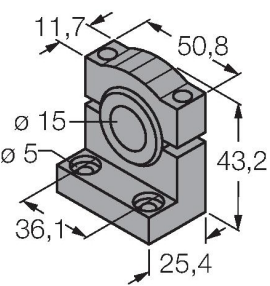

Technical drawing of the SMB1815SF mounting bracket. It is a black PBT bracket for PICO-GUARD points. Dimensions include: top width 50.8, top thickness 11.7, front width 36.1, front thickness 25.4, side width 43.2, and a central hole with diameter 15 and a smaller hole with diameter 5.

Mounting bracket, PBT black, for PICO-GUARD points


SMB30A	3032723
--------	---------

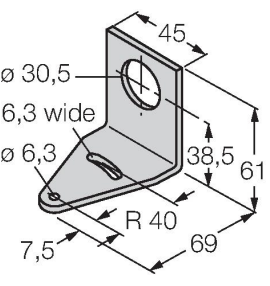

Technical drawing of the SMB30A mounting bracket. It is a rectangular stainless steel bracket for sensors with 30mm thread. Dimensions include: top width 45, top thickness 6.3, side width 61, front width 69, and a central hole with diameter 30.5. A radius of R 40 is indicated at the bottom corner.

Mounting bracket, rectangular, stainless steel, for sensors with 30mm thread


SMB30FAM10	3011185
------------	---------

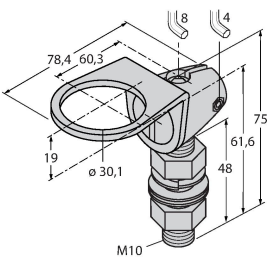

Technical drawing of the SMB30FAM10 mounting bracket. It is a stainless steel bracket for M10 x 1.5 thread, with a thread length of 30 mm. Dimensions include: top width 78.4, top thickness 60.3, side width 75, front width 61.6, and a central hole with diameter 30.1. A mounting hole with diameter 8 is also shown.

Mounting bracket, stainless steel, for M10 x 1.5 thread, thread length 30 mm

SMBAMS30P	3073135
-----------	---------

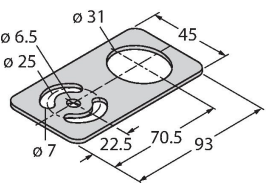

Technical drawing of the SMBAMS30P mounting bracket. It is a stainless steel bracket for sensors with 30 mm thread. Dimensions include: top width 45, top thickness 6.5, side width 93, front width 70.5, and a central hole with diameter 31. A mounting hole with diameter 25 and a smaller hole with diameter 7 are also shown.

Mounting bracket, stainless steel, for sensors with 30 mm thread