


QS30R Photoelectric Sensor – Opposed Mode Sensor (Emitter/ Receiver)






| Туре | QS30R |
|------------------------------|---|
| ID no. | 3073078 |
| Optical data | |
| Function | Opposed mode sensor |
| Operating mode | Receiver |
| Range | 060000 mm |
| Electrical data | |
| Operating voltage | 1030 VDC |
| Residual ripple | < 10 % U _{ss} |
| DC rated operational current | ≤ 150 mA |
| No-load current | ≤ 22 mA |
| Short-circuit protection | yes |
| Reverse polarity protection | yes |
| Output function | NO contact, PNP/NPN |
| Switching frequency | ≤ 100 Hz |
| Readiness delay | ≤ 100 ms |
| Response time typical | < 5 ms |
| Mechanical data | |
| Design | Rectangular with thread, QS30 |
| Dimensions | Ø 30 x 35 x 22 x 49 mm |
| Housing material | Plastic, Thermoplastic material, Yellow |
| Lens | plastic, Acrylic |
| Electrical connection | Cable, 2 m, PVC |
| Number of cores | 5 |
| Core cross-section | 0.5 mm² |
| Ambient temperature | -20+70 °C |

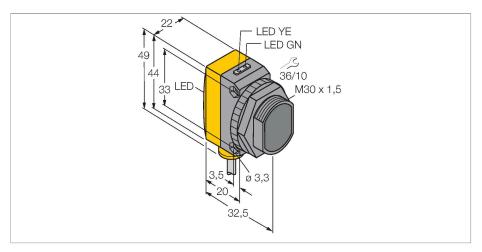

Features

- Cable, PVC, 2 m
 Protection class IP67
 LED all-round visible
- Operating voltage: 10...30 VDC Switching output, bipolar
- Light or dark operation

Wiring diagram




Functional principle

Opposed mode sensors consist of an emitter and receiver. They are installed opposite to each other so that the light from the emitter is aimed directly at the receiver. When an object interrupts or weakens the light beam, the sensor switches. Large distance operation is possible due to an excellent light/dark contrast and an extremely high excess gain.

Excess gain curve Excess gain in relation to the distance

Technical data

| Protection class | IP67 |
|------------------------|---|
| Power-on indication | LED, Green |
| Switching state | LED, Yellow |
| Error indication | LED, green, Flashing |
| Excess gain indication | LED, yellow |
| Tests/approvals | |
| MTTF | 293 years acc. to SN 29500 (Ed. 99) 40 °C |
| Approvals | CE |




Accessories

ø 3,3 M18 x 1

SMBQS30Y 3002811

Protective housing, stainless steel, for QS30 series




Protective housing with safety glas panel, stainless steel, for QS30 series

3072741


© 30,5 6,3 wide Ø 6,3 7,5 R 40 69

Mounting bracket, rectangular, stainless steel, for sensors with 30mm thread

3032723




3002809 Mounting bracket, stainless steel, for QS30 series



Mounting bracket, rectangular, stainless steel, for sensors with 30 mm thread, wide holes for accurate alignment

3027162



3052521 Mounting bracket, PBT black, for sensors with 30 mm thread, rotatable