


BIM-EG08-AN6X-H1341 Magnetic Field Sensor – Magnetic-inductive Proximity Sensor

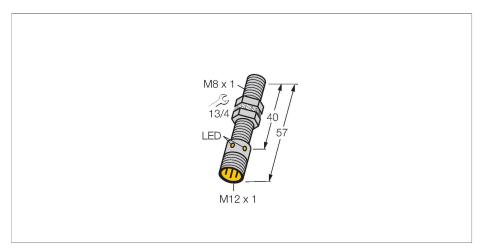


Technical data


Tura	DIM ECON ANGV 114244	
Type	BIM-EG08-AN6X-H1341	
ID	4621301	
General data		
Rated switching distance	78 mm	
	In conjunction with magnet DMR31-15-5	
Repeat accuracy	≤ 0.3 % of full scale	
Temperature drift	≤ ±10 %	
Hysteresis	110 %	
Electrical data		
Operating voltage	1030 VDC	
Residual ripple	≤ 10 % U _{ss}	
DC rated operational current	≤ 150 mA	
No-load current	15 mA	
Residual current	≤ 0.1 mA	
Isolation test voltage	≤ 0.5 kV	
Short-circuit protection	yes / Cyclic	
Voltage drop at I _e	≤ 1.8 V	
Wire breakage/Reverse polarity protection	yes / Complete	
Output function	3-wire, NO contact, NPN	
Switching frequency	1 kHz	
Mechanical data		
Design	Threaded barrel, M8 x 1	
Dimensions	57 mm	
Housing material	Stainless steel, 1.4427 SO	
Active area material	Plastic, PA12-GF30	
Max. tightening torque of housing nut	5 Nm	

Features

- ■M8 × 1 threaded barrel
- Stainless steel, 1.4427 SO
- Rated operating distance 78 mm with DMR31-15-5 magnet
- ■DC 3-wire, 10...30 VDC
- ■NO contact, NPN output
- ■M12 x 1 connector

Wiring diagram






Functional principle

Magnetic inductive proximity sensors are actuated by magnetic fields and are thus capable of detecting permanent magnets through non-ferromagnetic materials (e.g. wood, plastic, non-ferrous metals, aluminium, stainless steel).

Thus it is possible to achieve large switching distances even with smaller housing styles. In combination with the actuation magnet DMR31-15-5 TURCK sensors feature a relatively high switching distance. Thus there are multiple detection possibilities, particularly if the mounting space is limited or other difficult sensing conditions prevail.





Technical data

Electrical connection	Connector, M12 × 1	
Environmental conditions		
Ambient temperature	-25+70 °C	
Vibration resistance	55 Hz (1 mm)	
Shock resistance	30 g (11 ms)	
Protection class	IP67	
MTTF	2283 years acc. to SN 29500 (Ed. 99) 40 °C	
Switching state	LED, Yellow	


Mounting instructions

Mounting instructions/Description		
	Diameter active area B	Ø 8 mm

Accessories

DMR20-10-4	6900214	DMR31-15-5	6900215
N → S 0 4 0 20 10	Actuation magnet; Ø 20 mm (Ø 4 mm), h: 10 mm; attainable switching distance 59 mm on BIM-(E)M12 magnetic field sensors or 50 mm on BIM-EG08 magnetic field sensors; for Q25L linear position sensors: recommended distance between the sensor and magnet: 34 mm	0 5 → S 0 31 → 15 →	Actuation magnet, Ø 31 mm (Ø 5 mm), h: 15 mm; attainable switching distance 90 mm on BIM-(E)M12 magnetic field sensors or 78 mm on BIM-EG08 magnetic field sensors; for Q25L linear position sensors: recommended distance between the sensor and magnet: 35 mm
DMR15-6-3	6900216	DM-Q12	6900367
0 3 0 15 0 15 0 15	Actuation magnet, Ø 15 mm (Ø 3 mm), h: 6 mm; attainable switching distance 36 mm on BIM-(E)M12 magnetic field sensors or 32 mm on BIM-EG08 magnetic field sensors; for Q25L linear position sensors: recommended distance between the sensor and magnet: 34 mm	2 x M3 0 3.1 2 x M3 26 17 16 14 40 12	Actuator, rectangular, plastic, attainable switching distance 58 mm on BIM-(E)M12 magnetic field sensors or 49 mm on BIM-EG08 magnetic field sensors; for Q25L linear position sensors: recommended distance between the sensor and magnet: 35 mm







Accessories

Dimension drawing	Туре	ID	
M12x1	RKH4-2/TFE	6935482	Connection cable, M12 female connector, straight, 3-pin, stainless steel coupling nut, cable length: 2 m, jacket material: PVC, gray; temperature range: -25+80 °C
M12×1 2/2 14	RKH4-2/TFG	6934384	Connection cable, M12 female connector, straight, 3-pin, stainless steel coupling nut, cable length: 2 m, jacket material: TPE, gray; temperature range: -40+105 °C