
# T30RW3RQ3 Photoelectric Sensor – Opposed Mode Sensor (Receiver)



#### Technical data


Type	T30RW3RQ3	
ID no.	3036951	
Optical data		
Function	Opposed mode sensor	
Operating mode	Receiver	
Range	060000 mm	
Electrical data		
Operating voltage	20250 VAC	
AC rated operational current	≤ 200 mA	
Output function	Dark operation, Relay output	
Switching frequency	≤ 40 Hz	
Readiness delay	≤ 100 ms	
Response time typical	< 16 ms	
Mechanical data		
Design	Rectangular with thread, T30	
Dimensions	Ø 30 x 45 x 40 x 64 mm	
Housing material	Plastic, Thermoplastic material	
Lens	plastic, Acrylic	
Electrical connection	Connectors, M12 × 1, PVC	
Number of cores	5	
Ambient temperature	-40+70 °C	
Protection class	IP69	
Special features	Encapsulated Wash down	
Power-on indication	LED, Green	
Switching state	LED, Yellow	
Excess gain indication	LED	

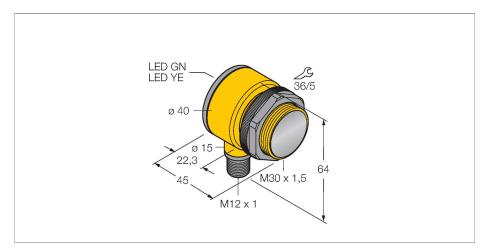

#### **Features**

- ■M12 × 1 male connector, 4-pin
- Protection classes IP67/IP69K
- ■Ambient temperature: -40 °C...+70 °C


## Wiring diagram



### Functional principle

Opposed mode sensors consist of an emitter and receiver. They are installed opposite each other so that the light from the emitter is aimed directly at the receiver. When an object interrupts or weakens the light beam, the sensor switches. Opposed mode sensors are the most reliable photoelectric sensors for detection of opaque targets. An excellent contrast between light and dark conditions and an extremly high excess gain are typical of this sensing mode, thus allowing operation over larger distances and under difficult conditions. Excess gain curve

Excess gain in relation to the distance







## Technical data

Tests/	ab'	pro	vals


Approvals CE, UL, CSA

#### Accessories

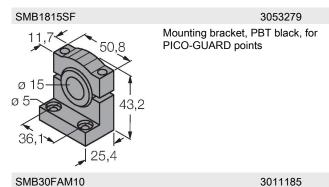




Mounting bracket, stainless steel, for M10 x 1.5 thread, thread length 30 mm



3032723 Mounting bracket, rectangular, stainless steel, for sensors with 30mm thread



Mounting bracket, stainless steel, for sensors with 30 mm thread

3073135