


# QS30LPQ Photoelectric Sensor – Retroreflective Sensor with Polarizing Filter



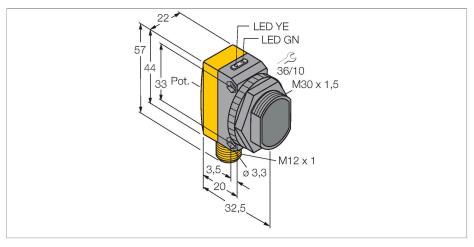


#### Technical data


Туре	QS30LPQ	
ID no.	3073084	
Optical data		
Function	Retroreflective Sensor	
Operating mode	Polarized	
Reflector included in delivery	no	
Light type	Red polarized	
Wavelength	630 nm	
Range	08000 mm	
Electrical data		
Operating voltage	1030 VDC	
Residual ripple	< 10 % U <sub>ss</sub>	
DC rated operational current	≤ 150 mA	
No-load current	≤ 35 mA	
Short-circuit protection	yes	
Reverse polarity protection	yes	
Output function	NO contact, PNP/NPN	
Switching frequency	≤ 250 Hz	
Readiness delay	≤ 100 ms	
Response time typical	< 2 ms	
Setting option	Potentiometer	
Mechanical data		
Design	Rectangular with thread, QS30	
Dimensions	Ø 30 x 35 x 22 x 57 mm	
Housing material	Plastic, Thermoplastic material, Yellow	
Lens	plastic, Acrylic	

#### **Features**

- Male M12 × 1, 5-pin
- ■Protection class IP67
- ■LED all-round visible
- Sensitivity adjusted via potentiometer
- Operating voltage: 10...30 VDC
- ■Switching output, bipolar
- ■Light or dark operation

# Wiring diagram





# Functional principle

Retro-reflective sensors incorporate emitter and receiver in the same compact housing. The light beam of the emitter is directed towards a reflector which returns the light back to the receiver. An object is detected when it interrupts this beam. Retro-reflective sensors incorporate some of the advantages of opposed mode sensors (good contrast and high excess gain). Further it is merely required to install and wire a single device. A smaller sensing range and susceptibility of devices without polarisation filter can be of




# Technical data

Electrical connection	Connectors, M12 × 1, PVC	
Number of cores	5	
Ambient temperature	-20+70 °C	
Protection class	IP67	
Power-on indication	LED, Green	
Switching state	LED, Yellow	
Error indication	LED, green, Flashing	
Excess gain indication	LED, yellow	
Tests/approvals		
Approvals	CE	

disadvantage when shiny objects have to be detected.

Excess gain curve Excess gain in relation to the distance




#### Accessories

SMB30A	
Ø 30,5 6,3 wide Ø 6,3 7,5 R 40	Mou stair thre


Mounting bracket, rectangular, stainless steel, for sensors with 30mm

3032723


3027162



3002809 Mounting bracket, stainless steel, for QS30 series




Mounting bracket, rectangular, stainless steel, for sensors with 30 mm thread, wide holes for accurate alignment



Mounting bracket, PBT black, for sensors with 30 mm thread, rotatable

3052521

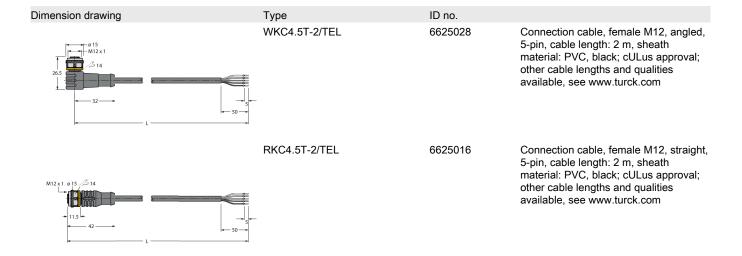

# Accessories

Dimension drawing	Type	ID no.	
7.4	BRT-84	3058979	Round reflector, reflection coefficient 1.4, material acrylic, ambient temperature -20 +60 °C

