
# NI75U-CP80-FDZ30X2 Inductive Sensor - With Increased Switching Distance

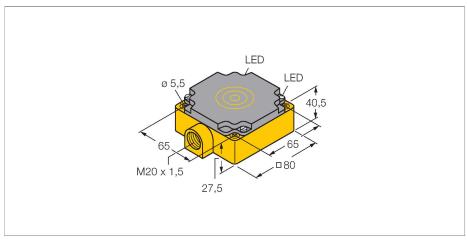


#### Technical data

| Туре                                      | NI75U-CP80-FDZ30X2                      |
|---|---|
| ID  | 4280900                                 |
| General data                              | 120000                                  |
| Rated switching distance                  | 75 mm                                   |
| Mounting conditions                       | Non-flush                               |
|   | ≤ (0.81 × Sn) mm                        |
| Secured operating distance                |   |
| Repeat accuracy                           | ≤ 2 % of full scale                     |
| Temperature drift                         | ≤ ±10 %                                 |
|   | ≤ ± 15 %, ≤ -25 °C v ≥ +70 °C           |
| Hysteresis                                | 315 %                                   |
| Electrical data                           |   |
| Operating voltage                         | 20250 VAC                               |
| Operating voltage                         | 10300 VDC                               |
| AC rated operational current              | ≤ 400 mA                                |
| DC rated operational current              | ≤ 300 mA                                |
| Frequency                                 | ≥ 50≤ 60 Hz                             |
| Residual current                          | ≤ 1.7 mA                                |
| Isolation test voltage                    | ≤ 1.5 kV                                |
| Surge current                             | ≤ 3 A (≤ 20 ms max. 5 Hz)               |
| Short-circuit protection                  | yes / Latching                          |
| Voltage drop at I <sub>e</sub>            | ≤ 6 V                                   |
| Wire breakage/Reverse polarity protection | yes / Complete                          |
| Output function                           | 2-wire, Connection programmable, 2-wire |
| DC field stability                        | 300 mT                                  |
| AC field stability                        | 300 mT <sub>ss</sub>                    |
| Smallest operating current                | ≥ 3 mA                                  |

#### **Features**


- Rectangular, height 41 mm
- ■Plastic, PBT-GF30-V0
- Factor 1 for all metals
- Resistant to magnetic fields
- Large coverage
- Extended temperature range
- High switching frequency
- ■AC 2-wire, 20...250 VAC
- ■DC 2-wire, 10...300 VDC
- ■NC/NO programmable
- ■Terminal chamber

#### Wiring diagram



#### Functional principle

Inductive sensors are designed for wear-free and contactless detection of metal objects. uprox Factor 1 sensors have significant advantages due to their patented ferritecoreless multi-coil system. They detect all metals at the same large switching distance and are resistant to magnetic fields.




### Technical data

| Insulation class         |   |
|--------------------------|---|
| Switching frequency      | 0.01 kHz                                  |
| Mechanical data          |   |
| Design                   | Rectangular, CP80                         |
| Dimensions               | 80 x 80 x 41 mm                           |
| Housing material         | Plastic, PBT-GF30-V0                      |
| Active area material     | PBT-GF30-V0                               |
| Electrical connection    | Terminal chamber                          |
| Clamping ability         | ≤ 2.5 mm²                                 |
| Environmental conditions |   |
| Ambient temperature      | -30+85 °C                                 |
| Vibration resistance     | 55 Hz (1 mm)                              |
| Shock resistance         | 30 g (11 ms)                              |
| Protection class         | IP67                                      |
| MTTF                     | 874 years acc. to SN 29500 (Ed. 99) 40 °C |
| Power-on indication      | LED, Green                                |
| Switching state          | LED                                       |

## Mounting instructions

#### Mounting instructions/Description

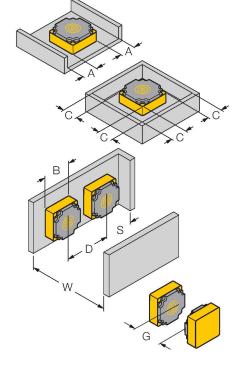

| Distance D             | 4 x B   |
|------------------------|---------|
| Distance W             | 3 x Sn  |
| Distance S             | 1.5 x B |
| Distance G             | 6 x Sn  |
| Distance A             | 1 x B   |
| Distance C             | 1 x B   |
| Width active area<br>B | 80 mm   |
|                        |         |