


# QS30RRX W/30

## Photoelectric Sensor – Opposed Mode Sensor (Emitter/Receiver)

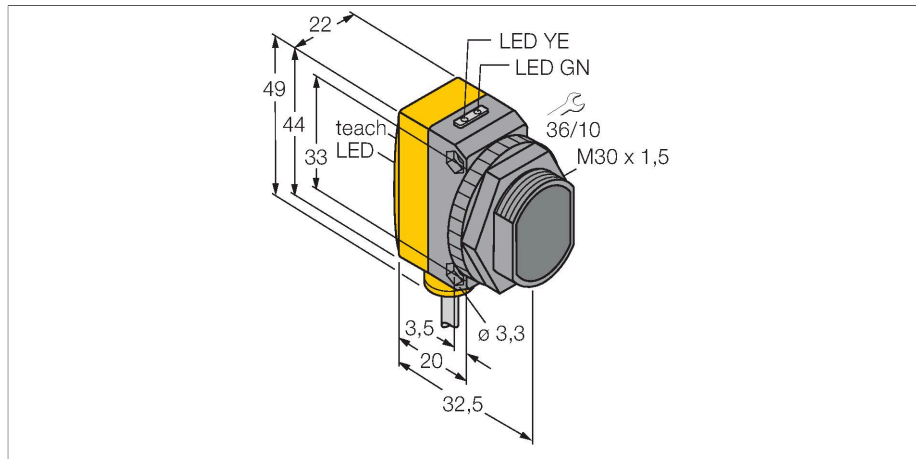

### Technical data


Type	QS30RRX W/30
ID no.	3071965
<b>Optical data</b>	
Function	Opposed mode sensor
Operating mode	Receiver
Wavelength	875 nm
Range	0...213000 mm
<b>Electrical data</b>	
Operating voltage	10...30 VDC
Residual ripple	< 10 % U <sub>ss</sub>
DC rated operational current	≤ 150 mA
No-load current	≤ 22 mA
Short-circuit protection	yes
Reverse polarity protection	yes
Output function	NO contact, dark operation, PNP/NPN
Switching frequency	≤ 100 Hz
Readiness delay	≤ 100 ms
Response time typical	< 5 ms
<b>Mechanical data</b>	
Design	Rectangular with thread, QS30
Dimensions	Ø 30 x 35 x 22 x 49 mm
Housing material	Plastic, Thermoplastic material, Yellow
Lens	plastic, Zeonex
Electrical connection	Cable, 9 m, PVC
Number of cores	5
Core cross-section	0.5 mm <sup>2</sup>



### Features

- Cable, PVC, 9 m
- Protection class IP67
- LED all-round visible
- Selectable operating frequency, protection against crosstalk
- 4-segment bargraph
- Operating voltage: 10...30 VDC
- Switching output, bipolar, dark operation

### Wiring diagram

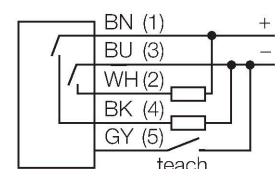


### Functional principle

Opposed mode sensors consist of an emitter and receiver. They are installed opposite to each other so that the light from the emitter is aimed directly at the receiver. When an object interrupts or weakens the light beam, the sensor switches. Large distance operation is possible due to an excellent light/dark contrast and an extremely high excess gain.

Excess gain curve  
Excess gain in relation to the distance

## Technical data

Ambient temperature	-20...+70 °C
Protection class	IP67
Special features	Encapsulated
Power-on indication	LED, Green
Switching state	LED, Yellow
Error indication	LED, green, Flashing
Excess gain indication	Bargraph, red, flashing
<b>Tests/approvals</b>	
MTTF	293 years acc. to SN 29500 (Ed. 99) 40 °C
Approvals	CE

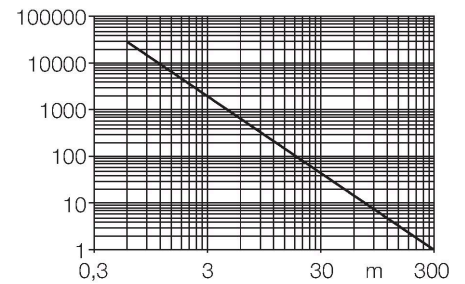

## Accessories

