


# Q453E Photoelectric Sensor – Opposed Mode Sensor (Emitter)



#### Technical data


Туре	Q453E
ID no.	3053994
Optical data	
Function	Opposed mode sensor
Operating mode	Emitter
Light type	IR
Wavelength	880 nm
Range	060000 mm
Electrical data	
Operating voltage	12250 VDC
Operating voltage	24250 VAC
DC rated operational current	≤ 5000 mA
No-load current	≤ 50 mA
Switching frequency	0.033 kHz
Readiness delay	≤ 0 ms
Mechanical data	
Design	Rectangular, Q45
Dimensions	Ø 30 x 87.6 x 56.4 x 44.5 mm
Housing material	Plastic, Thermoplastic material
Lens	acrylic, Acrylic
Electrical connection	Cable, 2 m, PVC
Number of cores	2
Core cross-section	0.5 mm <sup>2</sup>
Ambient temperature	-40+70 °C
Protection class	IP67
Power-on indication	LED, Green
Switching state	LED, Yellow
	· · · · · · · · · · · · · · · · · · ·

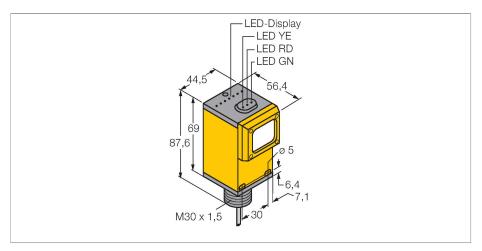

#### **Features**

- Cable, PVC, 2 m
- ■Protection class IP67
- Operating voltage: 12...250 VDC or 24... 250 VAC

## Wiring diagram




### Functional principle

Opposed mode sensors consist of an emitter and receiver. They are installed opposite each other so that the light from the emitter is aimed directly at the receiver. When an object interrupts or weakens the light beam, the sensor switches. Opposed mode sensors are the most reliable photoelectric sensors for detection of opaque targets. An excellent contrast between light and dark conditions and an extremly high excess gain are typical of this sensing mode, thus allowing operation over larger distances and under difficult conditions. Excess gain curve Excess gain in relation to the distance




## Technical data


Excess gain indication	LED, red
Tests/approvals	
MTTF	67 years acc. to SN 29500 (Ed. 99) 40 °C
Approvals	CE, cURus, CSA



### Accessories

M30 x 1,5







3011185 Mounting bracket, stainless steel, for M10 x 1.5 thread, thread length 30