


# Compact Multiprotocol I/O Module for Ethernet

## 8 Digital PNP 2 A Outputs

### TBEN-S1-8DOP

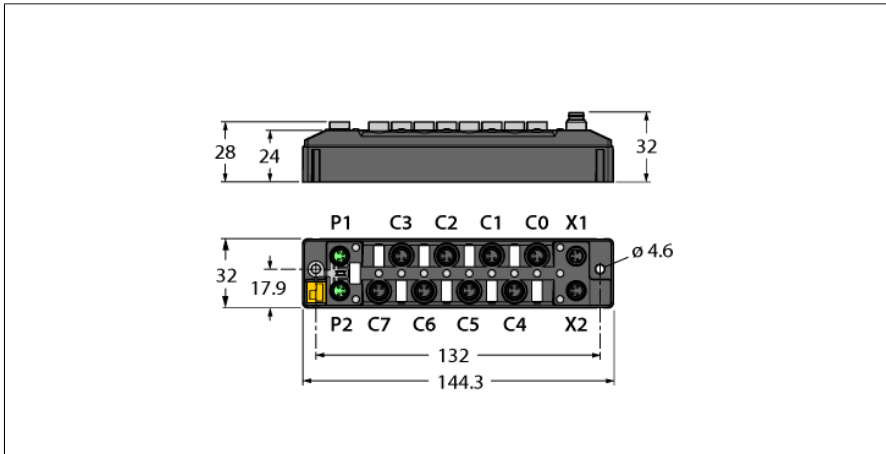

Type	TBEN-S1-8DOP
ID	6814022
<b>Supply</b>	
Supply voltage	24 VDC
Admissible range	18...30 VDC Total current max. 4 A per voltage group Total current V1 + V2 max. 5.5 A at 70 °C per module
Voltage supply connection	2 × M8, 4-pin, A-coded
Operating current	V1: max. 150 mA
Sensor/actuator supply	supply of ports C0-C7 from V2 short-circuit proof, 0.5 A for group C0-C3, C4-C7
Electrical isolation	galvanic isolation of the voltage groups V1 and V2, voltages up to 500 VAC
<b>System data</b>	
Fieldbus transmission rate	10/100 Mbps
Fieldbus connection technology	2 × M8, 4-pin
Protocol detection	automatic
Web server	default: 192.168.1.254
Service interface	Ethernet via P1 or P2
BEEP functionality	Supported
<b>Field Logic Controller (FLC)</b>	
ARGEE Firmware Version	3.1.4.0
ARGEE Engineering Version	2.0.24.0
<b>Modbus TCP</b>	
Addressing	Static IP, DHCP
Supported function codes	FC1, FC2, FC3, FC4, FC5, FC6, FC15, FC16, FC23
Number of TCP connections	8
Input register start address	0 (0x0000 hex)
Output register start address	2048 (0x0800 hex)

- PROFINET device, EtherNet/IP device or Modbus TCP slave
- Integrated Ethernet switch
- Supports 10 Mbps / 100 Mbps
- 2x M8, 4-pin, Ethernet fieldbus connection
- Glass fiber reinforced housing
- Shock and vibration tested
- Fully potted module electronics
- Protection classes IP65, IP67, IP69K
- 4-pin M8 male connector for power supply
- Galvanically isolated voltage groups
- ATEX Zone 2/22
- Max. 2 A per output
- Output diagnostics per channel
- Programmable ARGEE

Ethernet/IP	
Addressing	acc. to EtherNet/IP specification
Quick Connect (QC)	< 500 ms
Device Level Ring (DLR)	supported
Class 3 connections (TCP)	3
Class 1 connections (CIP)	10
Input Assembly Instance	103
Output Assembly Instance	104
Configuration Assembly Instance	106


PROFINET	
Version	2.35
Addressing	DCP
Conformance class	B (RT)
MinCycleTime	1 ms
Fast Start-Up (FSU)	< 500 ms
Diagnostics	acc. to PROFINET alarm handling
Topology detection	supported
Automatic addressing	supported
Media Redundancy Protocol (MRP)	supported
System redundancy	S2
Netload class	3

Digital outputs	
Number of channels	8
Connectivity outputs	M8, 3-pin
Output type	PNP
Type of output diagnostics	Channel diagnostics
Output voltage	24 VDC from potential group
Output current per channel	2 A, short-circuit proof
Load type	EN 60947-5-1: DC-13
Short-circuit protection	yes
Electrical isolation	Galvanically isolated to the fieldbus Voltage proof up to 500 VDC

Standard/Directive conformity	
Vibration test	Acc. to EN 60068-2-6 Acceleration up to 20 g
Shock test	acc. to EN 60068-2-27
Drop and topple	acc. to EN 60068-2-31/IEC 60068-2-32
Electromagnetic compatibility	Acc. to EN 61131-2
Approvals and certificates	CE FCC statement, UV resistant acc. to DIN EN ISO 4892-2A (2013)
UL Certificate	cULus LISTED 21 W2, Encl.Type 1 IND.CONT.EQ.
Note on ATEX/IECEx	The Quick Start Guide with information on use in Ex Zones 2 and 22 must be observed.

General Information	
Dimensions (W x L x H)	32 x 144 x 32 mm
Ambient temperature	-40...+70 °C
Storage temperature	-40...+85 °C
Altitude	Max. 5000 m
Protection class	IP65 IP67 IP69K
MTTF	283 years acc. to SN 29500 (Ed. 99) 20 °C
Housing material	PA6-GF30
Housing color	Black
Male connector material	Nickel-plated brass
Material label	Polycarbonate
Halogen-free	yes
Mounting	2 mounting holes □ 4.6 mm

Note the numbering of the IO range:  
From firmware version 3.1.4.0 and higher ports C0 to C7 and channels CH0 to CH7 are counted. For more details on the corresponding change see manual.



**Note**

It is strongly recommended to use only ready-made Ethernet cables!

Ethernet cable (example):

M8-M8:

ID number 6630376 PSG4M-0,2-PSG4M/TXN

ID number 6934033 PSGS4M-PSGS4M-4416-1M



M8-RJ45:

ID number 6935342 PSGS4M-RJ45S-4416-1M

M8-M12:

ID number 6935351 RSSD-PSGS4M-4416-2M

M8 × 1 Ethernet

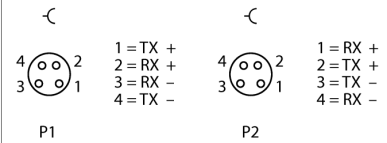

**Note**

Actuator and sensor cable/PUR cable (example):

M8 - open end




ID No. 6625562 PSG3M-2/TXL

M8-M8

ID No. 6625665 PKG3M-0,3-PSG3M/TXL

ID No. 6627137 PKG3M-3-PSG3M/TXL

M8 × 1 I/O port



**Note**


Power supply cable (example):

M8-M8

ID number 6627044 PKG4M-0,2-PSG4M/TXL

ID number 6626679 PKG4M-4-PSG4M/TXL

M8 × 1 power cable



**Module Status LED**

LED	Color	Status	Description
ETH1 / ETH2	Green	ON	Ethernet link (100 Mbps)
		flashing	Ethernet communication (100 Mbps)
	Yellow	ON	Ethernet link (10 Mbps)
		flashing	Ethernet communication (10 Mbps)
		OFF	No Ethernet link
BUS	Green	ON	Active connection to a master
		Flashing	Steady flashing: Ready Sequence of 3 flashes in 2 seconds: FLC/ARGEE active
	Red	ON	IP address conflict or Restore Mode or Modbus timeout
		Flashing	Blink/Wink command active
	Red/ Green	Alternating	Waiting for assignment of an IP address, DHCP or BootP
		OFF	Power off
ERR	Green	On	No diagnostics available
	Red	On	Diagnostics available Undervoltage diagnosis response is parameter dependent
		LED response master in the Beep network:	
	Green	1 Hz, 250 ms off	Cyclical IO data exchange
	Green/red	1 Hz, 250 ms red	Cyclical IO data exchange, diagnostics available
	Green/red	1 Hz, alternating	Discovery mode active
	Red		Discovery mode active, diagnostics available
	PWR	Green	On
Red		On	V <sub>2</sub> power supply off or V <sub>2</sub> undervoltage
		Off	V <sub>1</sub> power supply off or V <sub>1</sub> undervoltage

**LED Status I/O**

LED	Color	Status	Description
LED 0 ... 7	Green	ON	Output active
		Red	ON
		Flashing	Overload of the port supply. All LEDs of the affected group C0-C3 or C4-C7 are flashing.
		OFF	Output inactive
LED 7	White	Flashing	Blink/Wink command active

## Process Data Mapping of the Single Protocols

For more details on the corresponding protocols see manual.

### Modbus TCP

Register Addressing (16-bit)

Offset Process Input Data: 0x0000, structure acc. to general register mapping

Offset Process Output Data: 0x0800: Structure acc. to general register mapping

### EtherNet/IP™

Word addressing (16-bit)

#### Process input data (station -> scanner):

Status word is located in front of the general process data!

	Reg/ Word	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
GW status	0x0000	-	FCE	-	-	CFG	COM	V1	-	V2	-	-	-	-	-	-	Diag Warn
	0x0001	Structure according to general register mapping															
	...																

#### Process output data (scanner -> station):

Control word is located in front of the general process data!

	Reg/ Word	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Control	0x0000	reserved															
	0x0001	Structure according to general register mapping															
	...																

### PROFINET:

Byte addressing (8-bit)

Offset Process Input Data: 0x0000, structure acc. to general register mapping

Offset Process Output Data: 0x0000: Structure acc. to general register mapping

#### General Register Mapping

Address details are relative. Observe offset of respective protocol

Channel Assignment/Port/Pin:

Channel	-	-	-	-	-	-	-	-	-	Ch7	Ch6	Ch5	Ch4	Ch3	CH2	CH1	CH0
	-	-	-	-	-	-	-	-	-	DO7	DO6	DO5	DO4	DO3	DO2	DO1	DO0
Port	-	-	-	-	-	-	-	-	-	C7	C6	C5	C4	C3	C2	C1	C0
Pin	-	-	-	-	-	-	-	-	-	P4	P	P4	P4	P4	P4	P4	P4

#### Process Input Data:

	Reg/ Word	Byte	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
			MSB								LSB							
			Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Diagnostics	0x0000	0x0000	ERR7	ERR6	ERR5	ERR4	ERR3	ERR2	ERR1	ERR0	-	-	-	-	-	-	VERR V2 CH47	VERR V2 CH03
PWM Diagnos- tics Ch3	0x0001	0x0002	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	PWM OUT ERR
PWM Diagnos- tics Ch7	0x0002	0x0004	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	PWM OUT ERR
Module Status	0x0003	0x0006	-	FCE	-	-	-	COM	V1	-	V2	-	-	-	-	-	-	DIAG

#### Process Output Data:

	Reg/ Word	Byte	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
			MSB								LSB							
			Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Digital Outputs	0x0000	0x0000	-	-	-	-	-	-	-	-	DO7	DO6	DO5	DO4	DO3	DO2	DO1	DO0
PWM Ch3	0x0001	0x0002	-	-	-	-	-	-	-	-	Duty cycle							
PWM Ch7	0x0002	0x0004	-	-	-	-	-	-	-	-	Duty cycle							

Legend:

V1	Undervoltage V1	CFG	I/O configuration error
V2	Undervoltage V2	FCE	I/O-ASSISTANT Force Mode active
Cx	Port x	Px	Pin x
Dlx	Digital input channel x	DOx	Digital output channel x
Diag	Module diagnostics available	ERR x	Overcurrent output channel x
VERRVxCHyz	Overcurrent supply VAUXx channel y to z	PWMOUTERR	Overcurrent PWM output

VERRVxPyCz	Overcurrent supply VAUXx, pin y, port z	VAUXxPyCz	Supply VAUXx, pin y, port z
		CNT_RST	Counter reset