


T18AP6D

Photoelectric Sensor – Diffuse Mode Sensor

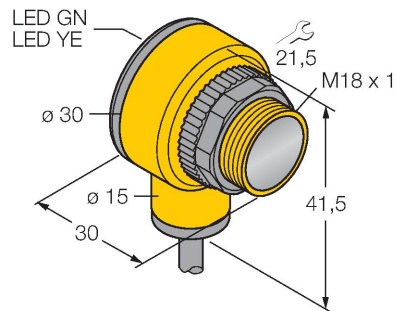


Technical data

Type	T18AP6D
ID no.	3044405
Optical data	
Function	Diffuse mode sensor
Light type	IR
Wavelength	880 nm
Range	0...500 mm
Electrical data	
Operating voltage	10...30 VDC
No-load current	≤ 25 mA
Short-circuit protection	yes / Cyclic
Reverse polarity protection	yes
Output function	Connection programmable, PNP
Switching frequency	≤ 160 Hz
Overcurrent release	> 220 mA
Mechanical data	
Design	Rectangular with thread, T18
Dimensions	30 x 30 x 41.5 mm
Housing material	Plastic, PBT
Lens	plastic, Acrylic
Electrical connection	Cable, 2 m, PVC
Number of cores	4
Core cross-section	0.5 mm ²
Ambient temperature	-40...+70 °C
Protection class	IP67
Special features	Wash down
Power-on indication	LED, Green

Features

- Cable, 2 m
- Protection class IP67
- Ambient temperature: -40...+70 °C
- Selectable light/dark operation or light operation with alarm function
- Operating voltage: 10...30 VDC
- PNP switching output, changeover

Wiring diagram

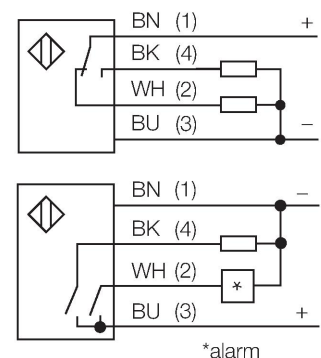

Functional principle


The emitter and receiver are incorporated in a single housing. The light reflection of the target is detected and triggers the sensor to switch. Thus the switching distance largely depends on the reflectivity of the target.

Excess gain curve

Excess gain in relation to the distance


Technical data

Switching state	LED, Yellow
Error indication	LED, green, Flashing
Alarm display	LED yellow Flashing
Tests/approvals	
Approvals	CE, UL, CSA

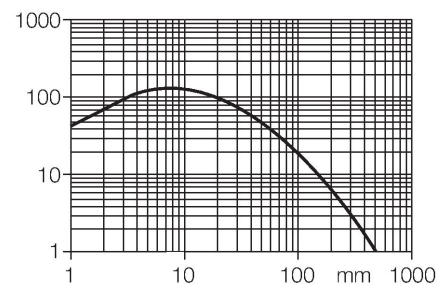


Accessories

SMB1815SF	3053279
-----------	---------



Mounting bracket, PBT black, for PICO-GUARD points

SMB18A	3033200
--------	---------




Mounting bracket, rectangular, stainless steel, for sensors with 18 mm thread

SMB18FM	3079421
---------	---------

mounting bracket, black, M22 x1.5 mm, male thread, female thread M18 x 1, for sensors with 18 mm thread

SMBAMS18P	3073134
-----------	---------



Mounting bracket, stainless steel, for sensors with 18 mm thread