




Technical data

|                        |                       |
|------------------------|-----------------------|
| Ambient temperature    | -20...+70 °C          |
| Protection class       | IP67                  |
| Power-on indication    | LED, Green            |
| Switching state        | LED, Yellow           |
| Error indication       | LED, green, Flashing  |
| Excess gain indication | LED, yellow, flashing |
| Tests/approvals        |                       |
| Approvals              | CE, cURus             |

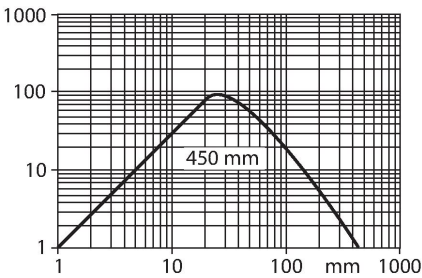

Accessories

SMB18A

3033200

SMB18AFAM10

3012558

SMBQS18A

3069721

SMB18SF

3052519

Accessories

| Dimension drawing | Type        | ID no.  |                                                                                                                                                                                                                 |
|-------------------|-------------|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                   | PKG4M-2/TEL | 6625061 | Connection cable, female M8, straight, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see <a href="http://www.turck.com">www.turck.com</a> |
|                   | PKW4M-2/TEL | 6625067 | Connection cable, female M8, angled, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see <a href="http://www.turck.com">www.turck.com</a>   |