


TL50HZRALS3C

LED Indicator – Tower Light




Technical data

Type	TL50HZRALS3C
ID	3033328
Signal and display data	
Purpose	LED indicator light
Function	Tower light
Light type	Red
Dimmable	No
Features of color 1	Red, Permanently on, 32 lm
Acoustic signal	Pulsed, 94 dB
Electrical data	
Operating voltage	18...30 VDC
DC rated operational current	≤ 100 mA
Operating voltage	21...27 VAC
AC rated operational current	≤ 80 mA
Max. current consumption per color	60 mA
Max. current consumption of beeper	35 mA
Input type	AC
Response time typical	< 500 ms
Mechanical data	
Cascadable	No
Design	Smooth barrel, TL50
Dimensions	Ø 50 x 202.7 mm
Housing material	Plastic, ABS, Grey
Window material	Polycarbonate, diffuse
Electrical connection	Cable, 2 m, PVC
Number of cores	4

Features

- Beeper
- Grey plastic housing
- EMI and RFI immune
- Protection class IP67
- Cable, 2 m
- Monochrome: Red (COL 1)
- Operating voltage: 85...264 VAC
- Beeper: Sealed, pulsed tone max. 94 dB

Wiring diagram

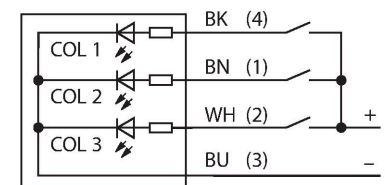

Functional principle

Monochrome multifunction acoustic warning
 Rugged and well-priced LED tower, easy to install
 Illuminated segments for clear operator guidance and display of system status
 Displays up to 5 colors
 Compact devices, no controller required
 No mounting
 The wiring diagram shows a PNP pin assignment


Technical data

Ambient temperature	-20...+50 °C
Relative humidity	0...95 %
Protection class	IP67
Tests/approvals	
Approvals	CE, UL listed

Accessories


SMB30A 3032723

Mounting bracket, rectangular, stainless steel, for sensors with 30mm thread



SMB30FA 3074005

Montagewinkel; Werkstoff VA 1.4401



SMB30SC 3052521

Mounting bracket, PBT black, for sensors with 30 mm thread, rotatable

