


VS8EAPR Photoelectric Sensor – Opposed Mode Sensor, Receiver






VS8EAPR
3803484
Opposed mode sensor
Receiver
650 nm
03000 mm
1030 VDC
< 10 % U _{ss}
≤ 20 mA
yes / Cyclic
yes
NO contact, PNP
1 kHz
≤ 300 ms
< 0.5 ms
Push Button Remote Teach
Rectangular, VS8
14.6 x 8 x 25.7 mm
Plastic, Black
plastic, PMMA
Cable, 2 m, PVC
4
-20+60 °C

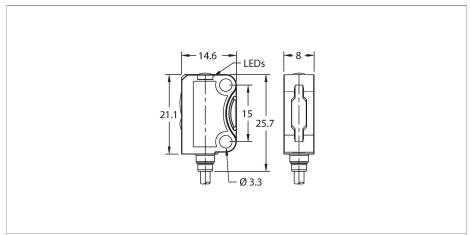

Features

- Connection via 2 m cable, PUR
- ■ECOLAB-certified
- Setting via pushbutton
- Operating voltage: 10...30 VDC
- ■Teach input
- ■PNP switching output, NO contact, switchable

Wiring diagram



Functional principle

These miniature photoelectric sensors in a rugged housing are ideal for detecting small parts in harsh environments. The bright and clearly visible light spots help with detecting extremely small objects. Devices with a blue emitter LED are also available, along with laser variants. The 4-pin devices all have a teach input that, in addition to the pushbutton on the devices, can be used to configure the sensor. This allows the switching point to be adjusted or the output behavior to be inverted. ECOLAB certification for devices with a cable connection rounds off the portfolio and allows use in cleanrooms or in the food industry.



Technical data


Protection class	IP67
Power-on indication	LED, Green
Switching state	LED, Yellow
Excess gain indication	LED
Tests/approvals	
Approvals	CE cULus

3803492

Accessories

SMBVS8RA

SMBQ12A	3074341
3 x o 3,2 5 0,9 R 15 29 34,2 10,5 0 3,2	Mounting bracket; material VA 1.4401, for photoelectric sensor, Q12 series

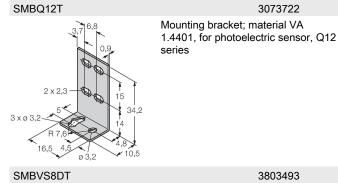

Mounting bracket, for VS8 series sensors, angled, stainless steel

Mounting clamp, plastic, black, for VS8 series sensors