


REM-100B10E-5C13S12M-H1181

Absolute Rotary Encoder - Multiturn Industrial Line

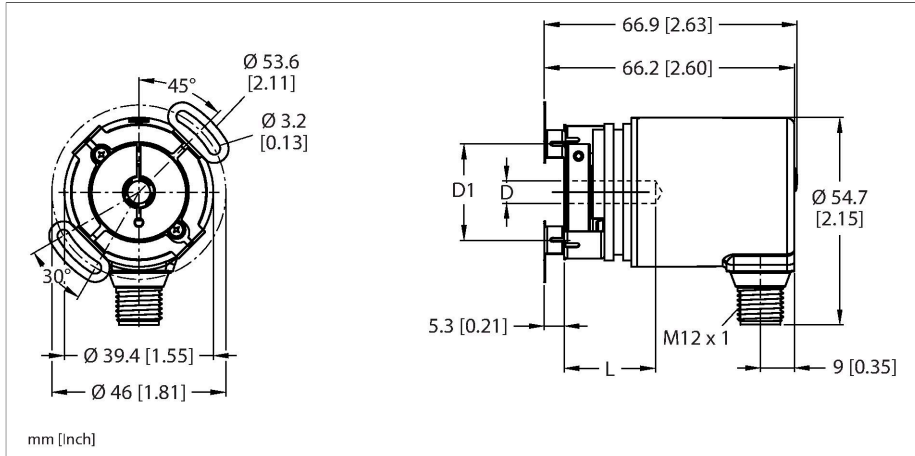



Features

- Flange with stator coupling, $\varnothing 46$ mm
- Blind hole hollow shaft, $\varnothing 10$ mm (plug-in depth max. 18.5 mm)
- Magnetic measuring principle
- Shaft material: stainless steel
- Protection class IP67 on housing and shaft side
- -40...+85 °C
- Max. 4000 rpm (continuous operation 2000 rpm)
- Energy harvesting technology
- 10...30 VDC
- SSI, binary
- M12 x 1 male, 8-pin
- Singleturn, 13-bit resolution
- Multiturn, 12-bit resolution

Technical data

Type	REM-100B10E-5C13S12M-H1181
ID	100011281
Measuring principle	Magnetic
General data	
Max. Rotational Speed	4000 rpm
Moment of inertia of the rotor	6×10^{-6} kgm ²
Starting torque	< 0.01 Nm
Repetition accuracy	$\pm 0.2^\circ$ At 25 °C
Absolute accuracy	$\pm 1^\circ$ At 25 °C
Output type	Absolute multiturn
Resolution singleturn	13 Bit
Resolution multiturn	12 Bit
Electrical data	
Operating voltage	10...30 VDC
No-load current	40 mA
Short-circuit protection	yes
Wire breakage/Reverse polarity protection	yes
Communication protocol	SSi
Output function	Binary coded
Mechanical data	
Design	Hollow shaft
Flange type	Flange with stator coupling
Flange diameter	$\varnothing 46$ mm
Shaft Type	Blind hole shaft
Shaft diameter D [mm]	10

Wiring diagram

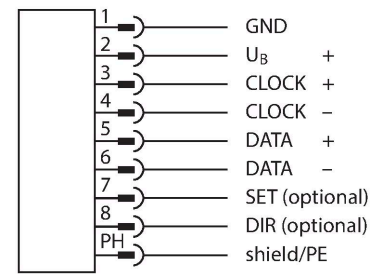

Technical data

Shaft Length L [mm]	18.5
Outer diameter of compression fitting D1	25.5 mm
Shaft material	Stainless steel
Housing material	Die-cast zinc
Electrical connection	Connector, M12 × 1
	M12, 8-pin
Axial shaft load	20 N
Radial shaft load	40 N
Environmental conditions	
Ambient temperature	-40...+85 °C
Vibration resistance (EN 60068-2-6)	300 m/s ² , 10...2000 Hz
Shock resistance (EN 60068-2-27)	2500 m/s ² , 6 ms
Protection class	IP67
Protection class shaft	IP67

Accessories

Dimension drawing	Type	ID	
	E-RKC 8T-264-2	U-04781	



Connection cable, female M12, straight, 8-pin (twisted pairs), shielded, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com