


TL30FRGR


LED Indicator – Multicolor/Multifunction Display

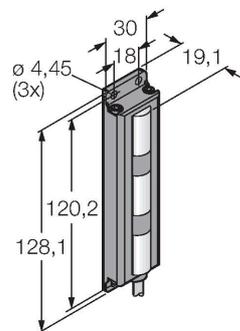

Features

- Plastic housing, black
- EMI and RFI immune
- Protection class IP65
- Cable 2 m
- Colors: Red (COL 1) / Green (COL 2) / Red (COL 3)
- Operating voltage: 18...30 VDC or 24 VAC with 45 mA per LED color
- Inputs: PNP/NPN

Wiring diagram

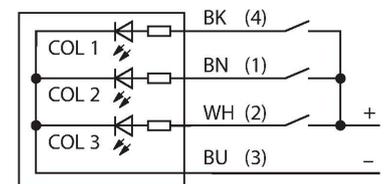

Functional principle

Flat multicolor/multifunction display
 Rugged and well-priced LED tower, easy to install
 Illuminated segments for clear operator guidance and display of system status
 Display of up to 5 colors
 Compact devices, no controller required
 No mounting
 The wiring diagram shows a PNP pin assignment

Technical data

| | |
|------------------------------------|--|
| Type | TL30FRGR |
| ID | 3097231 |
| Signal and display data | |
| Purpose | LED indicator light |
| Function | Tower light |
| Light type | Red Green Red |
| Dimmable | No |
| Features of color 1 | Red, Permanently on |
| Features of color 2 | Green |
| Features of color 3 | Red |
| Electrical data | |
| Operating voltage | 18...30 VDC |
| DC rated operational current | ≤ 18 mA |
| Operating voltage | 21...27 VAC |
| Max. current consumption per color | 18 mA |
| Input type | Bipolar (PNP/NPN)22 |
| Response time typical | < 1 ms |
| Mechanical data | |
| Cascadable | No |
| Design | Rectangular, TL30F |
| Dimensions | 128.1 x 30 x 19.1 mm |
| Housing material | Metal, AL Thermoplastic material, Black |
| Window material | Acrylic, diffuse |
| Electrical connection | Cable, 2 m, PVC |
| Number of cores | 4 |

Technical data


| | |
|------------------------|--------------|
| Ambient temperature | -40...+50 °C |
| Relative humidity | 0...95 % |
| Protection class | IP65 |
| Tests/approvals | |
| Approvals | CE |

Accessories

SMBPVA1

3056884

Mounting bracket, for PVA and PVD, stainless steel; set consisting of two brackets and screws



SMBPVA2

3054451

Mounting bracket, for PVA and PVD, for mounting on 28 mm pipes, 4 brackets (2 per sensor) included in delivery

