


RKC 4.4T-5-RSM 40/S3520

Aktuator- und Sensor Kabelsatz – Extension Cable




Features

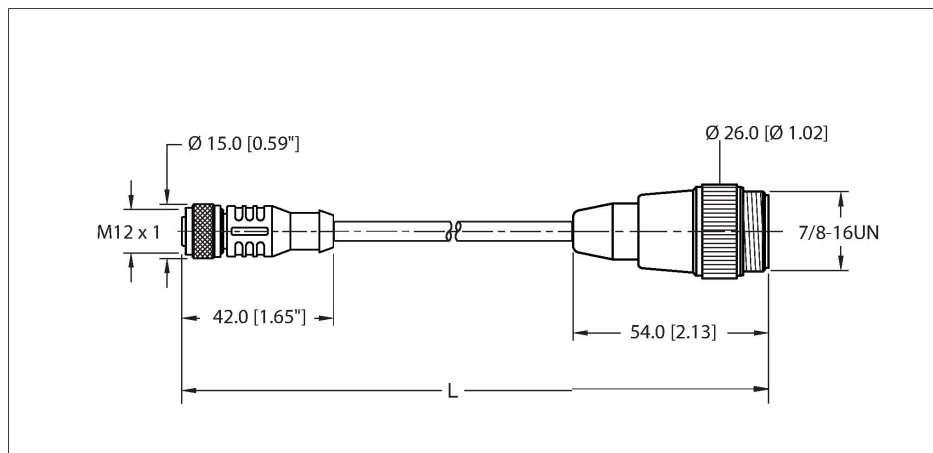

- M12 eurofast Kupplung, gerade
- 7/8" minifast Stecker, gerade
- M12 female connector, straight, 4-pin
- 7/8" male connector, straight, 4-pin
- Instrumentation Tray Cable
- PVC jacket, yellow, 4 × 18 AWG
- UV resistant
- -40 °C cold bending strength
- Oil resistant
- Fire classes: UL 1685 FT4, UL1061, CSA FT4
- Flexlife and C-Track approved



Cable Cross-Section

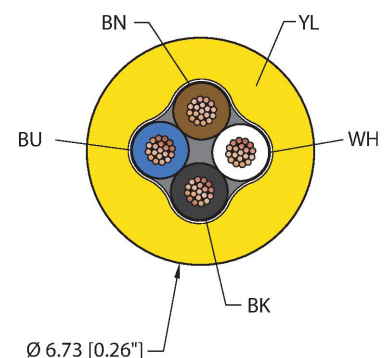


Contact assignment

Connector A

Connector B



Diagram



Technical data

Type	RKC 4.4T-5-RSM 40/S3520
ID	UX14185
Connector A	Female, M12 × 1, Straight, A-coded
Design specification	acc. to IEC 61076-2-101
Number of Pins	4
Contacts	Brass, CuZn, Gold-plated
Contact carriers	Plastic, TPU, Black
Connector body	Plastic, TPU, Yellow
Coupling nut/screw	Brass, CuZn, Nickel-plated
Seal	O ring, Plastic, FKM/FPM
Tightening torque (range)	0.8 ... 1 Nm (observe max. torque of mating connector!)
Mechanical lifespan	> 100 Mating cycles
Pollution degree	3
Protection class	IP67
	NEMA: 1, 3, 4, 6P
Connector B	Male, 7/8"-16 UN, Straight
Number of pins	4
Contacts	Brass, CuZn, Gold-plated
Contact carriers	Plastic, TPU, Yellow
Connector body	Plastic, TPU, Yellow
Coupling nut/retaining screw	Brass, CuZn, Nickel-plated
Tightening torque	2 Nm
Protection class	IP67, IP68, IP69, IP69K
	NEMA: 1, 3, 4, 6P, 12
Cable	
Cable ID	RF50548

Technical data

Number of cores	4
Cable diameter	Ø 6.73 mm
Cable length	5 m, (+ 50 mm or 4 % of the length/-0.0, depending on which value is larger)
Cable jacket	PVC, Yellow
Conductor diameter	0.076 "
Conductor material	TC (tinned copper)
Core insulation	PVC
Core cross-section	4 x 18 AWG [Similar to 0.75 mm²]
Arrangement of strands	19 x 0.0092 "
Core colors	BN, BU
Electrical properties at +20 °C	
Rated voltage	600 V
Current	9 A
Mechanical and chemical properties	
Bending radius (stationary installation)	≥ 5 x Ø
Bending radius (flexible use)	≥ 10 x Ø
Cold flexural strength	-40 °C
Bending cycles 20 x Ø	10 million *
	When correctly installed at 20 °C, 50 % RH and a cycle speed of ≤ 0.5 cycles per second.
C-track	Yes
Ambient temperature range (stationary)	-40...+105 °C
Ambient temperature range (In motion)	5...+105 °C
Ambient temperature during installation	-10...+105 °C
Approval	
Approvals	UL 2238 CSA C22.2 No. 182.3 CE RoHS
Note	
	Using the cable in extreme temperatures, when it is exposed to certain chemicals and above the nominal cycle speed or below the nominal bending radius of the cable can reduce the flexural strength.
	- We reserve the right to make technical modifications without prior notice.