


CL50RWXAOSPQ


LED Indicator – Tower Light

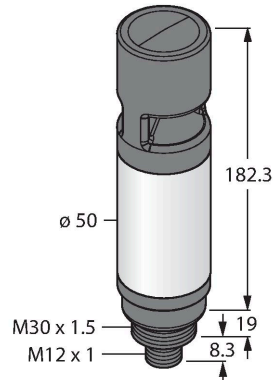

Features

- LED tower light with beeper, omnidirectional
- Individually controllable
- Mechanical screw-in thread M30 x 1.5
- Protection class IP67
- Multicolor: Red (COL 1) / White (COL 2)
- Beeper: Omnidirectional, sealed, continuous tone max. 99 dB

Wiring diagram

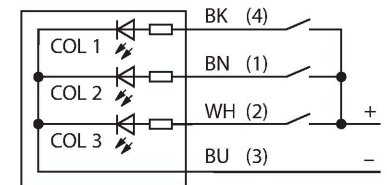


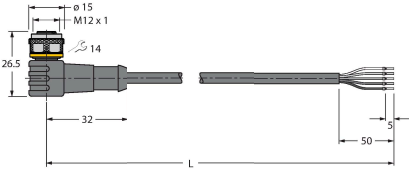
Functional principle

Multicolor multifunction acoustic signaller
Rugged and well-priced LED tower, easy to install
Illuminated segments for clear operator guidance and display of system status.
Display of up to 3 colors.
Compact devices, no controller required
No mounting
The wiring diagram shows the PNP input configuration. An instruction leaflet with detailed information about the connection is included with the devices.

Technical data

Type	CL50RWXAOSPQ
ID	3802504
Signal and display data	
Purpose	LED indicator light
Function	Tower light
Light type	Red White
Dimmable	No
Acoustic signal	Continuous tone, 99 dB
Electrical data	
Operating voltage	18...30 VDC
Input type	PNP
Response time typical	< 10 ms
Mechanical data	
Cascadable	No
Design	Cylindrical/Smooth, CL50
Dimensions	Ø 50 x 145.3 mm
Housing material	Plastic, ABS
Window material	Plastic, diffuse
Electrical connection	Connector, M12 × 1
Ambient temperature	-20...+50 °C
Protection class	IP67
Tests/approvals	
Approvals	CE, UL listed

Accessories

Dimension drawing	Type	ID	
	RKC4.5T-2/TEL	6625016	Connection cable, M12 female connector, straight, 5-pin, cable length: 2 m, jacket material: PVC, black; cULus approval
	WKC4.5T-2/TEL	6625028	Connection cable, M12 female connector, angled, 5-pin, cable length: 2 m, jacket material: PVC, black; cULus approval