


Technical data

Operating voltage	3.6...5.5 VDC
DC rated operational current	≤ 0.1 mA
Excess gain indication	LED, red
Power-on indication	LED, Green
Mechanical data	
Design	Rectangular, Q45
Dimensions	58.9 x 44.5 x 97.1 mm
Housing material	Plastic, PBT Lexan, Yellow
Antenna connection	Internal (wire loop)
Ambient temperature	-40...+70 °C
Storage temperature	-40...+70 °C
Relative humidity	0...90 %
Protection class	IP67
Tests/approvals	
MTTF	67 years acc. to SN 29500 (Ed. 99) 40 °C
Approvals	CE, cURus, CSA

Excess Gain Curve

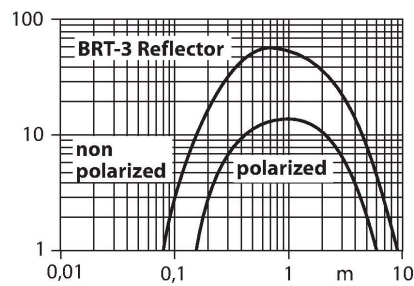

Accessories

BWA-BATT-006	3017987
Lithium-ion battery, 3.6 VDC, 2400 mAh, AA, GGV UN3090/CL9	