


# WLB92XWW550PBQ

## Work Light – Linear Light

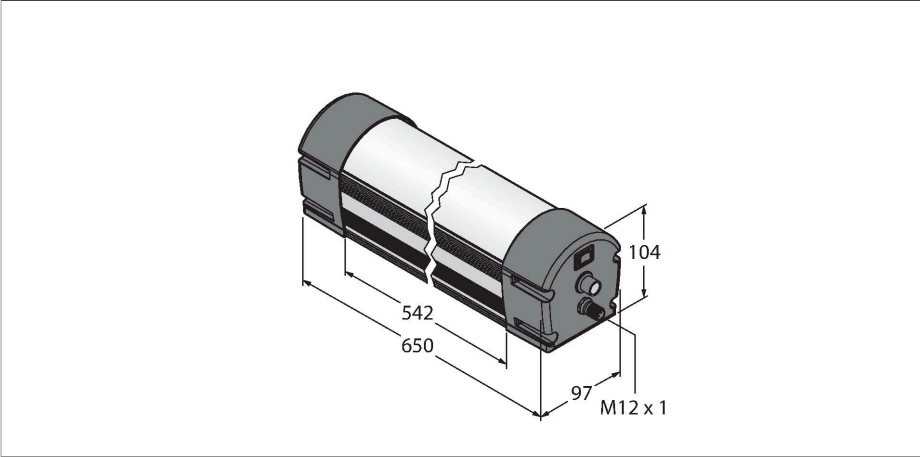


### Technical data

Type	WLB92XWW550PBQ
ID	3800652
Signal and display data	
Purpose	LED work light
Function	Linear light
Light type	White
Color temperature	4700...+5300 K
Luminous flux lumen	3130 lm
Dimmable	Potentiometer
Features of color 1	White, Permanently on, 3510 lm
Electrical data	
Operating voltage	21.6...26.4 VDC
DC rated operational current	≤ 1450 mA
Mechanical data	
Cascadable	No
Design	Rectangular, WLB92
Dimensions	671 x 97 x 104 mm
Housing material	Metal, AL, Anodized
Window material	Polycarbonate, diffuse
Electrical connection	Connector, M12 × 1, PVC
Number of cores	4
Ambient temperature	-40...+70 °C
Protection class	IP40
Tests/approvals	
Approvals	CE

### Features

- Light beam: 550 mm
- Operating voltage: 24 VDC (±10%)
- Protection class: IP50
- Color: White
- M12 x 1 male
- Built-in ON/OFF switch
- Integrated rotary switch for continuous dimming of the light output (0% - 100%)

### Wiring diagram



### Functional principle

The WLB92 LED linear light is designed for multi-purpose use, is powered by 24 VDC and convinces by its robust metal housing and shatter-proof window material. With the built-in toggle switch, the light can be switched on or off and also fully dimmed, 0%-100%, by the rotary switch. The color temperature lies in the range of daylight, between 5,000 and 10,000 Kelvin. With a lifetime of 50,000 hours and very energy efficient LEDs, this a cost-saving and environmentally friendly alternative to conventional fluorescent lamps. This linear light is available in two lengths and more than twice as bright as the known WLB32 LED light.

Accessories

LMBWLB92	3093567	Snap bracket for WLB92 work light, included in the WLB92 scope of delivery	LMBWLB92CLIP	3093568	Snap bracket for WLB92 linear light
LMBWLB92HK5	3093569	Pendant mounting bracket for WLB92	LMBWLB92S	3093570	Mounting bracket for front side mounting of the WLB92
LMBWLB92RAS	3093571	Pivoting mounting bracket for WLB92 line light			

Accessories

Dimension drawing	Type	ID	
	RKC4.4T-2/TEL	6625013	Connection cable, M12 female connector, straight, 4-pin, cable length: 2 m, jacket material: PVC, black; cULus approval
	WKC4.4T-2/TEL	6625025	Connection cable, M12 female connector, angled, 4-pin, cable length: 2 m, jacket material: PVC, black; cULus approval