
# LEDRB85X220QPMA| 17-11-2023 14-17 | Technical modifications reserved

# LEDRB85X220QPMA Vision System – Backlight

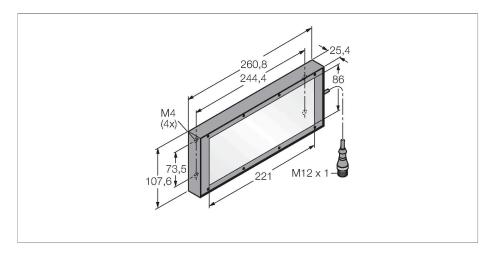

## **Features**


■ Protection class: IP40

Color: red

■Power supply: 24 VDC

■M12 x 1 male

# Wiring diagram



### Technical data

Туре	LEDRB85X220QPMA
ID	3073276
Signal and display data	
Purpose	Image processing
Function	Area light
Light type	Red
Wavelength	620630 nm
LED service life (L70)	50000 h
Features of color 1	Red
Electrical data	
Operating voltage	24 VDC
DC rated operational current	≤ 500 mA
Max. current consumption per color	500 mA
Mechanical data	
Design	Rectangular
Dimensions	260.8 x 107.6 x 25 mm
Housing material	Metal, Low-carbon steel
Window material	Acrylic, diffuse
Electrical connection	Cable with connector, M12 × 1, 0.15 m, PUR
Number of cores	4
Ambient temperature	0+50 °C
Protection class	IP40
Tests/approvals	
Approvals	CE, cULus listed

# Functional principle

Installed directly behind the object, opposite to the sensor. Highly diffuse surfaces and consistent brightness, with lower intensity compared to other lights.