


# REM-98B8E-8BAR-H1151

## Absolute Rotary Encoder - Multiturn Industrial Line

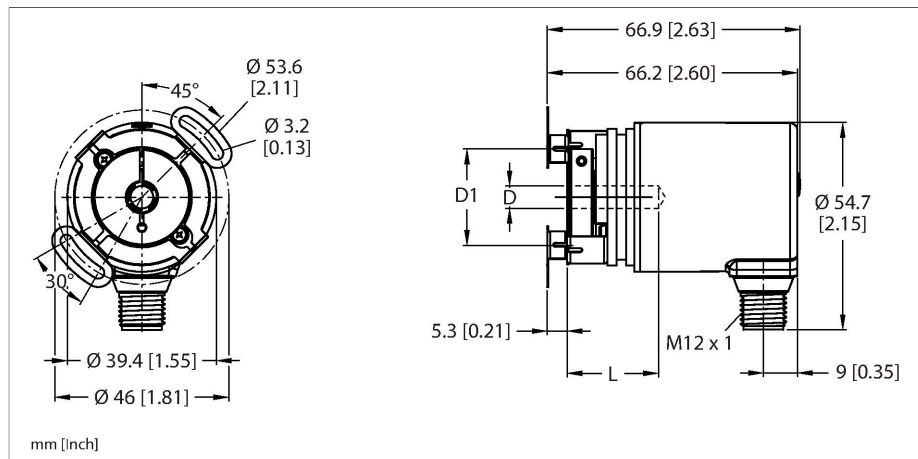




### Features

- Flange with stator coupling, Ø 46 mm
- Blind hole hollow shaft, Ø 8 mm (plug-in depth max. 18.5 mm)
- Magnetic measuring principle
- Shaft material: stainless steel
- Protection class IP67 on housing and shaft side
- -40...+85 °C
- Max. 4000 rpm (continuous operation 2000 rpm)
- Energy harvesting technology
- 15...30 VDC
- Analog output, 0...10 V per 16 CW revolutions
- 12-bit resolution
- M12 × 1 male connector, 5-pin

### Technical data

Type	REM-98B8E-8BAR-H1151
ID	100011344
Measuring principle	Magnetic
<b>General data</b>	
Max. Rotational Speed	4000 rpm
Starting torque	< 0.01 Nm
Absolute accuracy	± 1 ° At 25 °C
Output type	Absolute multiturn
<b>Electrical data</b>	
Operating voltage	15...30 VDC
No-load current	35 mA
Short-circuit protection	yes
Wire breakage/Reverse polarity protection	yes
Output function	Analog output
Voltage output	0...10 V
<b>Mechanical data</b>	
Design	Hollow shaft
Flange type	Flange with stator coupling
Flange diameter	Ø 46 mm
Shaft Type	Blind hole shaft
Shaft diameter D [mm]	8
Shaft Length L [mm]	18.5
Outer diameter of compression fitting D1	25.5 mm
Shaft material	Stainless steel
Housing material	Die-cast zinc

### Wiring diagram

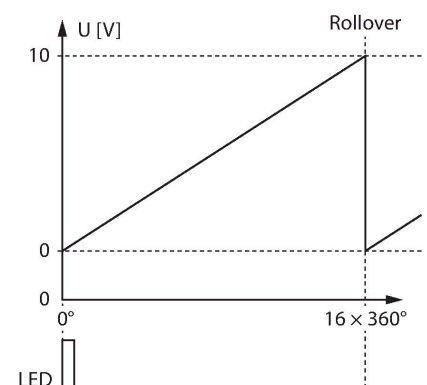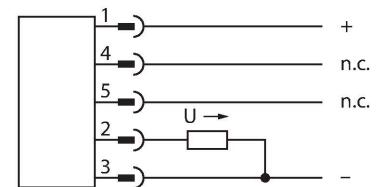

## Technical data

Electrical connection	Connector, M12 × 1
	M12, 5-pin
Axial shaft load	20 N
Radial shaft load	40 N
<b>Environmental conditions</b>	
Ambient temperature	-40...+85 °C
Vibration resistance (EN 60068-2-6)	300 m/s <sup>2</sup> , 10...2000 Hz
Shock resistance (EN 60068-2-27)	2500 m/s <sup>2</sup> , 6 ms
Protection class	IP67
Protection class shaft	IP67

## Accessories

Dimension drawing	Type	ID	
	RKC4.5T-2/TEL	6625016	Connection cable, M12 female connector, straight, 5-pin, cable length: 2 m, jacket material: PVC, black; cULus approval

