


VAS22-S80E-0.25-DAS22-S-FS5.432/TXL

Valve Connector, A Type – Extension Cable





Features

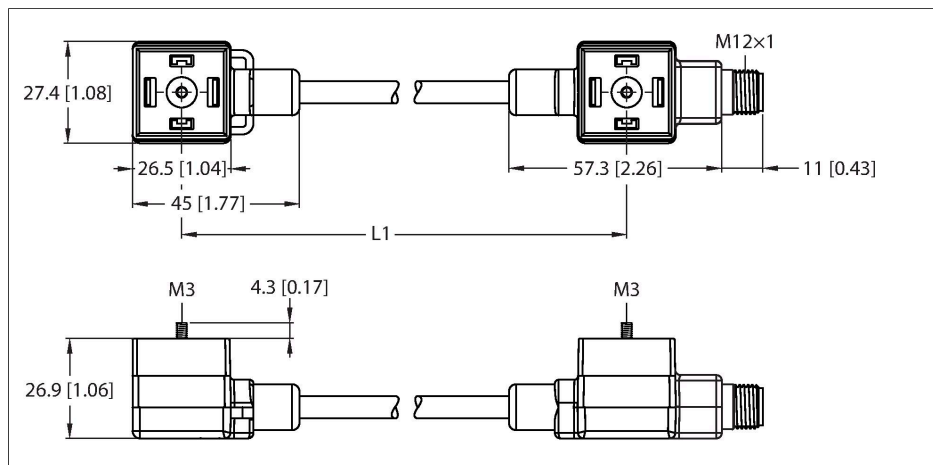

- 2-pin + PE
- Design according to the DIN EN 175301-803
- RoHS-compliant
- Protection class: IP65, IP67, IP68
- Protective component: Transil diode
- Jacket material: PUR
- Jacket color: black
- Suitable for drag chain use
- Resistant to chemicals and oils
- UV and ozone resistance
- Flame retardant
- Free from halogen, silicone, PVC and LABS

Contact assignment

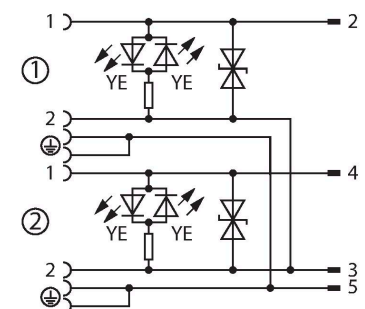

Technical data

Type	VAS22-S80E-0.25-DAS22-S-FS5.432/TXL
ID	6606673
Number of Pins	2+PE, PE bridged
Protective component	Transil diode
Display switch state	LED, Yellow/yellow
Protection class	IP65, IP67, IP68
Cable diameter	Ø 6.4 mm ±0.20
Cable length	0.25 m
Cable jacket	PUR, Black
Core insulation	PP
Core cross-section	4 x 0.75 mm ²
Arrangement of strands	42 x 0.15 mm
Core colors	BN, BU, GNYE, BK
Electrical properties at +20 °C	
Current	4 A
Mechanical and chemical properties	
Bending radius (stationary installation)	≥ 5 x Ø
Bending radius (flexible use)	≥ 10 x Ø
Bending cycles	≥ 2 million
Torsional stress	± 180 °/m
Ambient temperature range (stationary)	-40...+80 °C
Ambient temperature range (In motion)	-30...+90 °C
Ambient temperature during drag chain operation	-25...+60 °C