


WLB92ZCB1100PBQM

Work Light – Linear Light

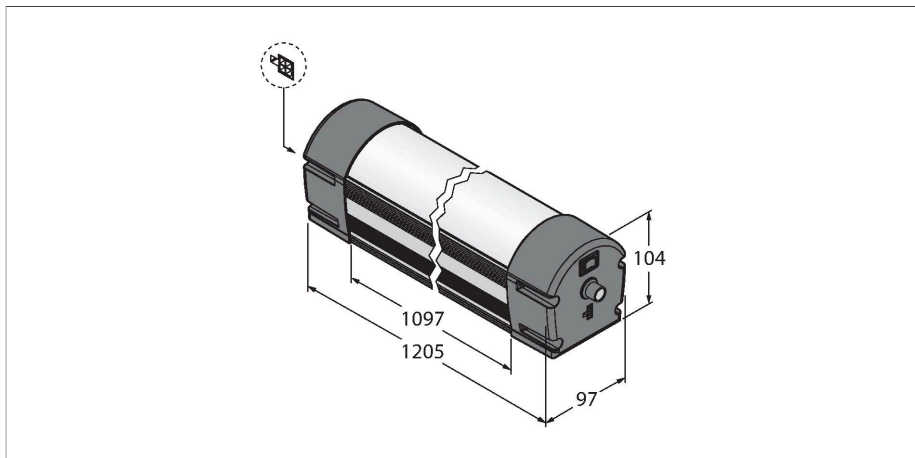

Features

- Light beam: 550 mm
- Operating voltage: 24 VDC (±10%)
- Protection class: IP50
- Color: Blue
- M12 x 1 male
- Built-in ON/OFF switch
- Integrated rotary switch for continuous dimming of the light output (0% - 100%)

Functional principle


The WLB92 LED linear light is designed for multi-purpose use, is powered by 24 VDC and convinces by its robust metal housing and shatter-proof window material. With the built-in toggle switch, the light can be switched on or off and also fully dimmed, 0%-100%, by the rotary switch. The color temperature lies in the range of daylight, between 5,000 and 10,000 Kelvin. With a lifetime of 50,000 hours and very energy efficient LEDs, this a cost-saving and environmentally friendly alternative to conventional fluorescent lamps. This linear light is available in two lengths and more than twice as bright as the known WLB32 LED light.

Technical data


Type	WLB92ZCB1100PBQM
ID	3803107
Signal and display data	
Purpose	LED work light
Function	Linear light
Light type	Blue
Dimmable	Potentiometer
Features of color 1	Blue, Permanently on, 840 lm
Electrical data	
Operating voltage	100...277 VAC
Mechanical data	
Cascadable	Yes
Design	Rectangular, WLB92
Dimensions	1220 x 97 x 104 mm
Housing material	Metal, AL, Anodized
Window material	Polycarbonate, diffuse
Electrical connection	Connector, PVC
Number of cores	3
Ambient temperature	-40...+45 °C
Protection class	IP40
Tests/approvals	
Approvals	CE

Accessories


LMBWLB92 **3093567**
 Snap bracket for WLB92 work light,
 included in the WLB92 scope of
 delivery




LMBWLB92CLIP **3093568**
 Snap bracket for WLB92 linear light




LMBWLB92HK5 **3093569**
 Pendant mounting bracket for WLB92





LMBWLB92S **3093570**
 Mounting bracket for front side
 mounting of the WLB92



LMBWLB92RAS **3093571**
 Pivoting mounting bracket for WLB92
 line light



Accessories

Dimension drawing	Type	ID	
	LQMAC-306	3086779	Connection cable, 3-wire, stranded wire
	LQMAEC-306SS	3085580	Extension cable to cascade WLB32 lights, length 1.83 m, optional