


K30LBOVPQ

LED Indicator – Beacon




Technical data

Type	K30LBOVPQ
ID	3093759
Signal and display data	
Purpose	LED indicator light
Function	Spotlight
Light type	Blue Orange Purple
Dimmable	No
Electrical data	
Operating voltage	10...30 VDC
DC rated operational current	≤ 25 mA
Input type	PNP
Response time typical	< 1 ms
Mechanical data	
Cascadable	No
Design	Cylinder, threaded, K30L
Dimensions	Ø 30 x 57 mm
Housing material	Plastic, PC
Window material	Plastic, diffuse
Electrical connection	Connector, M12 × 1
Ambient temperature	-40...+50 °C
Protection class	IP67 IP69
Tests/approvals	
MTTF	626 years acc. to SN 29500 (Ed. 99) 40 °C
Approvals	CE

Features


- LED all-round visible
- Individually controllable
- Mechanical screw-in thread M22x1.5
- Protection class IP67
- Multicolor: Green (COL 1) / Yellow (COL 2) / Red (COL 3)
- Male M12x1
- Operating voltage 10...30 VDC

Wiring diagram

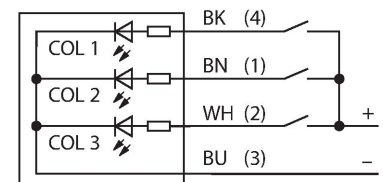

Accessories

SMB22A	3079414
--------	---------

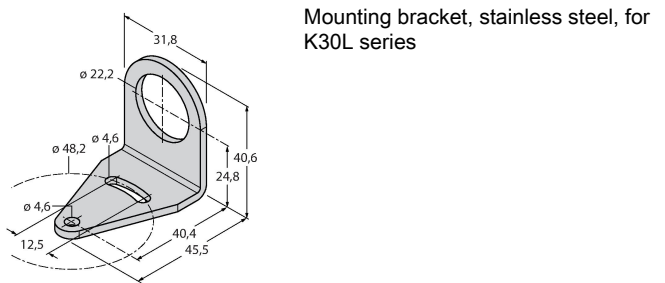

Accessories

Dimension drawing	Type	ID	
	RKC4.4T-2/TEL	6625013	Connection cable, M12 female connector, straight, 4-pin, cable length: 2 m, jacket material: PVC, black; cULus approval
	WKC4.4T-2/TEL	6625025	Connection cable, M12 female connector, angled, 4-pin, cable length: 2 m, jacket material: PVC, black; cULus approval