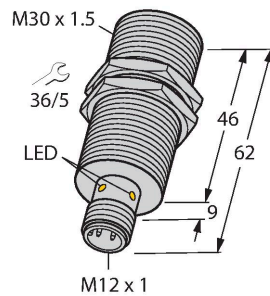


BI15U-EM30WD-AN6X-H1141

Inductive Sensor – For the Food Industry





Features

- Threaded barrel, M30 x 1.5
- Stainless steel, 1.4404
- Front cap made of liquid crystal polymer
- Factor 1 for all metals
- Resistant to magnetic fields
- For temperatures of -40 °C...+100 °C
- High protection class IP69K for harsh environments
- Special double-lip seal
- Protection against all common acidic and alkaline cleaning agents
- Laser engraved label, permanently legible
- DC 3-wire, 10...30 VDC
- NO contact, NPN output
- M12 x 1 male connector

Technical data

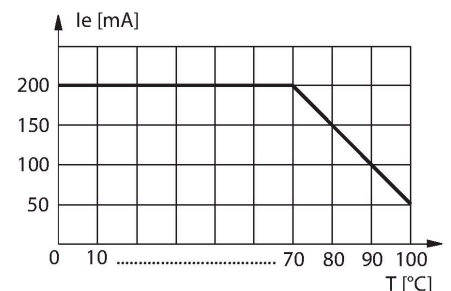
| | |
|---|--|
| Type | BI15U-EM30WD-AN6X-H1141 |
| ID | 1634834 |
| General data | |
| Rated switching distance | 15 mm |
| Mounting conditions | Flush |
| Secured operating distance | $\leq (0.81 \times S_n)$ mm |
| Repeat accuracy | $\leq 2 \%$ of full scale |
| Temperature drift | $\leq \pm 10 \%$ $\leq \pm 20 \%, \leq -25 \text{ °C}, \geq +70 \text{ °C}$ |
| Hysteresis | 3...15 % |
| Electrical data | |
| Operating voltage | 10...30 VDC |
| Residual ripple | $\leq 10 \%$ U_{ss} |
| DC rated operational current | ≤ 200 mA |
| No-load current | 25 mA |
| Residual current | ≤ 0.1 mA |
| Isolation test voltage | ≤ 0.5 kV |
| Short-circuit protection | yes / Cyclic |
| Voltage drop at I_o | ≤ 1.8 V |
| Wire breakage/Reverse polarity protection | yes / Complete |
| Output function | 3-wire, NO contact, NPN |
| DC field stability | 300 mT |
| AC field stability | 300 mT _{ss} |
| Insulation class | □ |
| Switching frequency | 0.75 kHz |

Wiring diagram



Functional principle

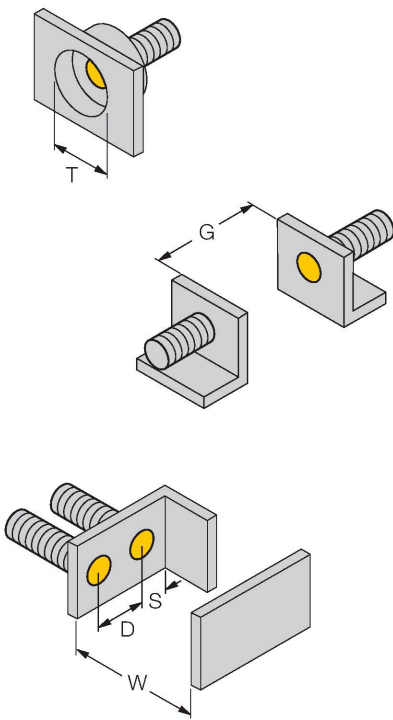
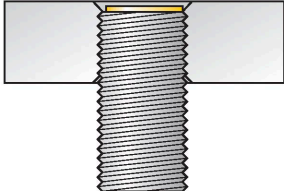
The inductive sensors for the food industry are absolutely tight and resistant to cleaning agents and disinfectants, thanks to the LCP front cap and the stainless steel housing.



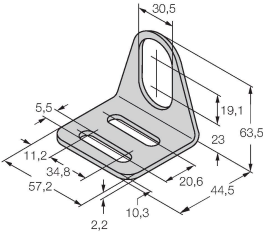


Technical data

| Mechanical data | |
|---------------------------------------|---|
| Design | Threaded barrel, M30 x 1.5 |
| Dimensions | 62 mm |
| Housing material | Stainless steel, 1.4404 (AISI 316L) |
| Active area material | Plastic, LCP |
| Connector housing | plastic, PP |
| Admissible pressure on front cap | ≤ 10 bar |
| Max. tightening torque of housing nut | 75 Nm |
| Electrical connection | Connector, M12 × 1 |
| Environmental conditions | |
| Ambient temperature | -40...+100 °C |
| Vibration resistance | 55 Hz (1 mm) |
| Shock resistance | 30 g (11 ms) |
| Protection class | IP68 IP69K |
| MTTF | 874 years acc. to SN 29500 (Ed. 99) 40 °C |
| Switching state | LED, Yellow |

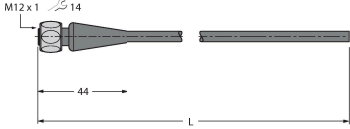
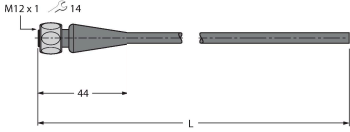
Mounting instructions

| Mounting instructions/Description | | | | | | | | | | | | |
|--|---|------------|-------|------------|--------|------------|-------|------------|---------|------------|--------|------------------------|
|  |  | | | | | | | | | | | |
| | <table><tr><td>Distance D</td><td>60 mm</td></tr><tr><td>Distance W</td><td>3 x Sn</td></tr><tr><td>Distance T</td><td>3 x B</td></tr><tr><td>Distance S</td><td>1.5 x B</td></tr><tr><td>Distance G</td><td>6 x Sn</td></tr><tr><td>Diameter active area B</td><td>Ø 30 mm</td></tr></table> | Distance D | 60 mm | Distance W | 3 x Sn | Distance T | 3 x B | Distance S | 1.5 x B | Distance G | 6 x Sn | Diameter active area B |
| Distance D | 60 mm | | | | | | | | | | | |
| Distance W | 3 x Sn | | | | | | | | | | | |
| Distance T | 3 x B | | | | | | | | | | | |
| Distance S | 1.5 x B | | | | | | | | | | | |
| Distance G | 6 x Sn | | | | | | | | | | | |
| Diameter active area B | Ø 30 mm | | | | | | | | | | | |
| <p>All flush mountable uprox+ threaded barrel types are also recessed mountable. Safe operation is ensured if the sensor is screwed in by half a turn.</p> | | | | | | | | | | | | |

Accessories

| | | | | | |
|---|---------|--|--|---------|--|
| MW-30 | 6945005 | Mounting bracket for threaded barrel sensors; material: Stainless steel A2 1.4301 (AISI 304) | BSS-30 | 6901319 | Mounting clamp for smooth and threaded barrel sensors; material: Polypropylene |
|  | | |  | | |
| PN-M30 | 6905308 | Protective nut for M30 x 1 threaded barrel devices; material: Stainless steel A2 1.4305 (AISI 303) | | | |
|  | | | | | |

Accessories

| Dimension drawing | Type | ID | |
|---|------------|---------|--|
|  | RKH4-2/TFE | 6935482 | Connection cable, M12 female connector, straight, 3-pin, stainless steel coupling nut, cable length: 2 m, jacket material: PVC, gray; temperature range: -25...+80 °C |
|  | RKH4-2/TFG | 6934384 | Connection cable, M12 female connector, straight, 3-pin, stainless steel coupling nut, cable length: 2 m, jacket material: TPE, gray; temperature range: -40...+105 °C |