


excom I/O System Converter, 115 VAC PPSA115EX

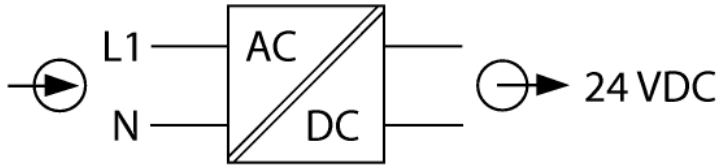

The AC/DC converter PPSA115Ex supplies the excom® system with power to the full extension. A combined protection rating of Ex m and Ex e enables application in zone 1. It is also fully potted and installed in a die-cast aluminium frame.

Powered with 115 VAC. The external power supply is hooked up to Ex e clamps at the module rack. These clamps located under a closure cap must not be plugged or unplugged under power. Interventions are only allowed after switching off the respective supply voltage.

Redundancy:

Two power supply units can be installed in combination with a suitable module rack. In case of power cut or failure of one device, the second unit provides the power for the whole system. Different potentials can be supplied.

- AC/DC converter for DC supply of DC power supply module

Dimensions

Type	PPSA115EX
ID	6900294
Nominal voltage	115 VAC
Operating voltage range	100...125 VAC
Power consumption	≤ 85 VA
Output power	≤ 66.5 W
Galvanic isolation	Galvanically isolated input and output circuit, rated voltage 250 V

Ex approval acc. to conformity certificate	IECEX PTB 17.0002X
Ex approval acc. to conformity certificate	PTB 04 ATEX 2047X
Device designation	Ⓔ II 2 G Ex eb mb IIC T4

Displays/Operating elements

Electrical connection	Via module rack
Terminal cross-section	2.5 mm ² flexible/4.0 mm ² rigid

Housing material	Aluminium
Connection mode	Flange, 4 x M4 screws (Torx)
Protection class	IP50
Ambient temperature	-20...+70 °C
Relative humidity	≤ 93 % at 40 °C acc. to IEC 60068-2-78
Vibration test	Acc. to IEC 60068-2-6
Shock test	Acc. to IEC 60068-2-27
EMC	acc. EN 61326-1 (2013) acc. to NAMUR NE21 (2007)
MTTF	829 years acc. to SN 29500 (Ed. 99) 40 °C
Dimensions	45 x 155 x 106 mm

Approvals	ATEX cFMus cFM IECEX CCC INMETRO KOSHA EAC Ex DNV GL BV LR KR CE
-----------	--

