


# SM2A312C2


## Photoelectric Sensor – Convergent Mode Sensor



### Features

- Cable, PVC, 2 m
- Protection class IP67
- Sensitivity adjustable via potentiometer
- Alignment indicator
- Operating voltage: 24...240 VAC
- Switching output, bipolar
- Light/dark operation

### Wiring diagram

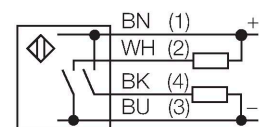


### Technical data

Type	SM2A312C2
ID no.	3034065
<b>Optical data</b>	
Function	Proximity switch
Operating mode	Convergent
Light type	IR
Wavelength	880 nm
Focal distance	43 mm
Range	43 mm
<b>Electrical data</b>	
Operating voltage	24...240 VAC
Output function	Relay output
Readiness delay	≤ 300 ms
Response time typical	< 4 ms
Setting option	Potentiometer
<b>Mechanical data</b>	
Design	Rectangular with thread, Mini Beam
Dimensions	Ø 18 mm
Housing material	Plastic, Thermoplastic material, Yellow
Lens	plastic, Acrylic
Electrical connection	Cable, 2 m, PVC
Number of cores	2
Ambient temperature	-20...+70 °C
Protection class	IP67
Excess gain indication	LED
<b>Tests/approvals</b>	
Approvals	CE, cURus, CSA


### Functional principle

Convergent mode sensors are equipped with a lens in front of the emitter diode that produces a small and intense focal point at a defined distance from the sensor. Similar to diffuse mode sensors, the light reflected by the target is evaluated. Convergent mode sensors are ideal for detection of small targets or colour marks and edge guiding or positioning control of transparent materials. The targets must always be within the focal depth of the sensors. The focal depth is defined as the area in front of or behind the focal point within which the object can be detected. Based on the intense light concentration in the focal point, convergent mode sensors are capable of detecting targets with a low reflectivity.


Excess gain curve  
Excess gain in relation to the distance

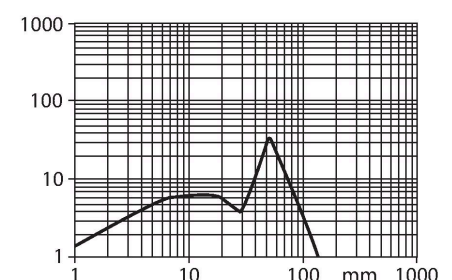


## Accessories

**SMB18A**
**3033200**



Mounting bracket, rectangular, stainless steel, for sensors with 18 mm thread

**SMB18AFAM10**
**3012558**



Mounting bracket, material VA 1.4401, for M10 x 1.5 thread, thread length 18 mm

**SMB18SF**
**3052519**


Mounting bracket, PBT black, for sensors with 18 mm thread, rotatable

**SMB312B**
**3025519**


Mounting bracket, stainless steel, for MINI-BEAM NAMUR

**SMB3018SC**
**3053952**


Mounting bracket, PTB black, for sensors with 18 mm thread