


PROFIBUS-PA

IP67 junction box, 4-channel

JBBS-48-E413/3G

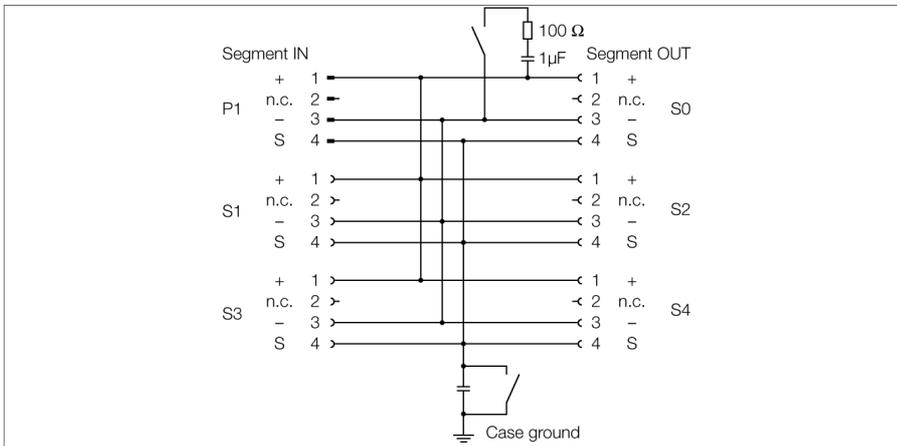

The 4-channel junction box JBBS-48-E413/3G is designed for PROFIBUS-PA systems.

The housing is made of powder-coated die-cast aluminium and is IP67 rated.

The junction box is equipped with an activatable terminating resistor for the bus. The switch is integrated in the housing on the board.

Condensation in the housing is prevented by a breather.


Shielding and housing can be connected directly via a second switch which is also located on the board.

Note: It must be ensured that there is sufficient equipotential bonding in the system. The device is connected to the equipotential bonding via the housing's M5 x 1 grounding bold.

- Junction box for wall mounting with stainless steel M12 flange connections
- Integrated terminating resistor (activatable)
- Cable shielding: Capacitive or direct connection to housing potential selectable via switch
- Isolated support terminal for optional protective conductor incorporated in cable
- Powder-coated die-cast aluminium housing
- Pressure compensation element protects against condensation
- Connection of the housing potential via M5 x 1 bolt
- Entity and FISCO compliant according to IEC 60079-11

| | |
|--|---|
| Type | JBBS-48-E413/3G |
| ID | 6611400 |
| Fieldbus standard | IEC 61158-2 |
| Operating voltage | 9...32 VDC |
| Ex approval acc. to conformity certificate | TURCK Ex-13016H X |
| Device designation | Ⓢ II 3 G Ex nA II T4 Gc |
| Device designation | Ⓢ II 3 G Ex ic IIC T4 Gc |
| | FISCO / Entity field device |
| Electrical connection | M12 receptacle |
| Segment IN | 1 x M12 - male |
| Segment OUT | 1 x M12 - female |
| Spur line | 4 x M12 - female |
| Earthing bolt | M5 x 1 |
| Protection class | IP67 |
| MTTF | 705 years acc. to SN 29500 (Ed. 99) 40 °C |
| Ambient temperature | -25...+70 °C |
| Housing material | Powder-coated die-cast aluminium |
| Housing color | Black/yellow |
| Dimensions | 64 x 150 x 45 mm |
| Connection mode | Wall mounting |


Dimensions

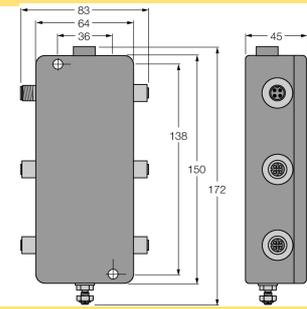

pin assignment


— M12 x 1

Segment in



⊖ M12 x 1

Segment out, Drop



nominal values: 4 A, 300 V