


XSH-RSM-2RKM 57

2-Way Splitter – H-Splitter without Cable for CAN (DeviceNet, CANopen)




Features




- 7/8" connector
- Male – 2 x female, 5-pin
- Wired in parallel
- RoHS-compliant
- Protection class: NEMA 1, 3, 4, 6P and IEC IP67


Contact assignment



Headline Wiring Diagram



Circuit Diagram

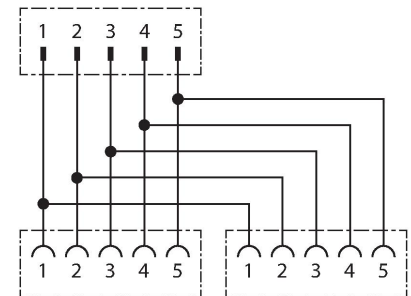

Technical data

Type	XSH-RSM-2RKM 57
ID	U2-23663
Distributed I/O	h-splitter, 2 -port
Housing	Plastic, TPU, Black
Connector A	Male, 7/8"-16 UN
Number of Pins	5
Contacts	Brass, CuZn, Gold-plated
Contact carriers	Plastic, TPU, Blue
Coupling nut/screw	Brass, CuZn, Nickel-plated
Mechanical lifespan	> 100 Mating cycles
Protection class	IP67, Only in screwed condition
Connector B	Female, 7/8"-16 UN
Number of pins	5
Contacts	Brass, CuZn, Gold-plated
Contact carriers	Plastic, TPU, Black
Coupling nut/retaining screw	Brass, CuZn, Nickel-plated
Seal	Plastic
Mechanical life	> 100 Mating cycles
Protection class	IP67
Network protocol	DeviceNet
Electrical properties at +20 °C	
Rated voltage	600 V
Current	9 A
Mechanical and chemical properties	
Ambient temperature range (stationary)	-40...+105 °C

Technical data

Ambient temperature range (In motion) -40...+105 °C

Note

- We reserve the right to make technical modifications without prior notice.