


## Measuring Light Screen Emitter MAHE51A



Туре	MAHE51A	
ID	3062657	
Optical data		
Function	Opposed mode sensor (emitter)	
Operating mode	Emitter	
Light type	IR	
Wavelength	880 nm	
Optical resolution	2.5 mm	
Range	3801800 mm	
Scan field	1300 mm	
Number of beams	512	
Electrical data		
Operating voltage	11.414 VDC	
Mechanical data		
Design	Rectangular, Mini Array	
Housing material	Metal, AL	
Lens	plastic, Acrylic	
Electrical connection	Connector, 7/8"	
Ambient temperature	0+50 °C	
Protection class	IP65	
Tests/approvals		
Approvals	CE	
Approvals	CE	
	cULus recognized	

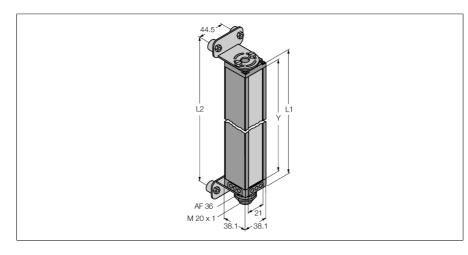

- Minimum target size 2.5 mm
- Scan field 1300 mm
- Max. sensing range 1.8 m
- Operating voltage 11.8...12.2 VDC (from controller)
- Protection class IP65
- Adjustment via software

## Functional principle

Measuring light screens are ideally suited for precise detection and inspection tasks such as product profiling, sizing, edge and centre guiding, hole and parts detection and the like. Each system consists of an emitter, receiver and a controller module, which is equipped with several switching and analogue outputs, depending on the specific version. The device also enables data transmission via RS232 or R485, either in an binary or ASCII code format. The scan times depend on the height of the measuring array and the adjusted scan mode. Detailed infomation can be taken from the instruction manual.