


# SM31RQDP


## Photoelectric Sensor – Opposed Mode Sensor (Emitter/Receiver)

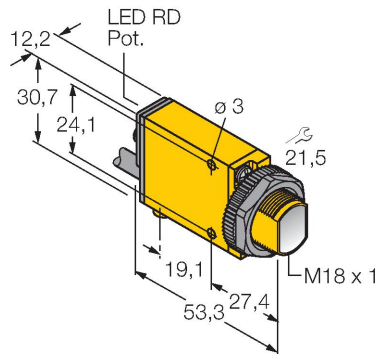

### Features

- Cable with male end M12 × 1, 4-pin, PVC, 150 mm
- Protection class IP67
- Sensitivity adjustable via potentiometer
- Alignment indicator
- Operating voltage: 10...30 VDC
- Switching output, bipolar
- Light/dark operation

### Wiring diagram




### Technical data

|                              |                                            |
|------------------------------|--------------------------------------------|
| Type                         | SM31RQDP                                   |
| ID no.                       | 3028551                                    |
| <b>Optical data</b>          |                                            |
| Function                     | Opposed mode sensor                        |
| Operating mode               | Receiver                                   |
| Range                        | 3000 mm                                    |
| <b>Electrical data</b>       |                                            |
| Operating voltage            | 10...30 VDC                                |
| Residual ripple              | < 10 % U <sub>ss</sub>                     |
| DC rated operational current | ≤ 150 mA                                   |
| No-load current              | ≤ 25 mA                                    |
| Output function              | NO contact, PNP/NPN                        |
| Switching frequency          | ≤ 500 Hz                                   |
| Readiness delay              | ≤ 100 ms                                   |
| Response time typical        | < 1 ms                                     |
| Overcurrent release          | > 220 mA                                   |
| Setting option               | Potentiometer                              |
| <b>Mechanical data</b>       |                                            |
| Design                       | Rectangular with thread, Mini Beam         |
| Dimensions                   | Ø 18 x 53.3 x 12.3 x 30.7 mm               |
| Housing material             | Plastic, Thermoplastic material, Yellow    |
| Lens                         | plastic, Acrylic                           |
| Electrical connection        | Cable with connector, M12 × 1, 0.15 m, PVC |
| Number of cores              | 4                                          |
| Ambient temperature          | -20...+70 °C                               |

### Functional principle

Opposed mode sensors consist of an emitter and receiver. They are installed opposite each other so that the light from the emitter is aimed directly at the receiver. When an object interrupts or weakens the light beam, the sensor switches. Opposed mode sensors are the most reliable photoelectric sensors for detection of opaque targets. An excellent contrast between light and dark conditions and an extremely high excess gain are typical of this sensing mode, thus allowing operation over larger distances and under difficult conditions.

Excess gain curve  
Excess gain in relation to the distance

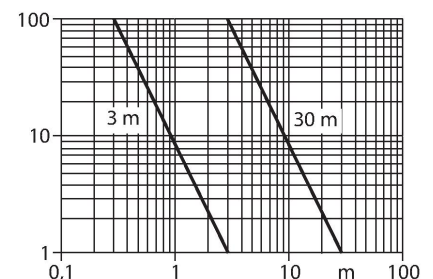

## Technical data

|                        |                                           |
|------------------------|-------------------------------------------|
| Protection class       | IP67                                      |
| Special features       | Encapsulated                              |
| Switching state        | LED, Red                                  |
| Excess gain indication | LED, red, flashing                        |
| <b>Tests/approvals</b> |                                           |
| MTTF                   | 777 years acc. to SN 29500 (Ed. 99) 40 °C |
| Approvals              | CE, cURus, CSA                            |

## Accessories

