


K50LYBWP


LED Indicator – Beacon

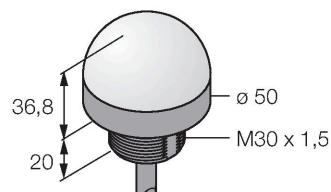

Features

- LED all-round visible
- Individually controllable
- Screw-in thread M30x1.5
- Protection class IP67
- Multicolor: Yellow (COL 1) / Blue (COL 2) / White (COL 3)
- Cable 2 m
- Operating voltage 18...30 VDC

Wiring diagram

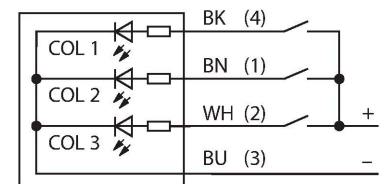

Technical data

Type	K50LYBWP
ID	3078331
Signal and display data	
Purpose	LED indicator light
Function	Spotlight
Light type	Yellow Blue White
Dimmable	No
Features of color 1	Yellow, Permanently on
Features of color 2	Blue
Features of color 3	White
Special features	Wash down
Electrical data	
Operating voltage	18...30 VDC
DC rated operational current	≤ 40 mA
Max. current consumption per color	40 mA
Input type	PNP
Response time typical	< 1 ms
Mechanical data	
Cascadable	No
Design	Dome, K50L
Dimensions	Ø 50 x 58 mm
Housing material	Plastic, PC, Black
Window material	Polycarbonate, diffuse
Electrical connection	Cable, 2 m, PVC
Number of cores	4

Technical data


Ambient temperature	-40...+50 °C
Relative humidity	0...90 %
Protection class	IP67 IP69
Tests/approvals	
MTTF	249 years acc. to SN 29500 (Ed. 99) 40 °C
Approvals	CE, UL listed

Accessories

SMB30A

3032723

Mounting bracket, rectangular, stainless steel, for sensors with 30mm thread



SMB30SC

3052521

Mounting bracket, PBT black, for sensors with 30 mm thread, rotatable

