


# PT100R-2105-U6-DT043P

## Pressure Transmitter – Ratiometric Output (3-Wire)

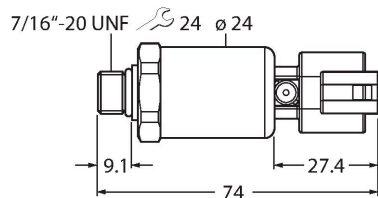



### Features

- For mobile hydraulic applications
- Fully welded metal measuring cell
- Sealless
- With pressure tip orifice
- Compact and robust design
- Excellent EMC properties
- Excellent accuracy and long-term stability
- Kfz-Norm ISO 16750
- Pressure range 0...100 bar rel.
- 5 VDC  $\pm$  10 %
- Ratiometric output 10...90 %
- Process connection 7/16" UNF (SAE) male thread
- Plug-in device, Deutsch DT04-3P

### Technical data

|   |  |
|---|--|
| Type                                      | PT100R-2105-U6-DT043P  |
| ID  | 100012157  |
| <b>Pressure range</b>                     |  |
| Pressure type                             | Relative pressure  |
| Pressure range                            | 0...100 bar  |
|   | 0...1450.38 psi  |
|   | 0...10 MPa   |
| Admissible overpressure                   | $\leq$ 300 bar   |
| Burst pressure                            | $\geq$ 600 bar   |
| Response time                             | < 2 ms, typ. 1 ms  |
| Long-term stability                       | 0.3 % FS, acc. to IEC EN 61298-2                               |
| <b>Power supply</b>                       |  |
| Operating voltage                         | 4.5...5.5 VDC  |
| Current consumption                       | $\leq$ 7 mA  |
| Short-circuit/reverse polarity protection | yes / yes  |
| Protection type and class                 | IP69K / III  |
| Insulation voltage                        | 500 VDC  |
| <b>Outputs</b>                            |  |
| Output 1                                  | Analog output  |
| Output function                           | ratiom. 10...90%   |
| <b>Analog output</b>                      |  |
| Voltage output                            | 0.5...4.5 V  |
| Load                                      | $\leq$ 100 nF / $>$ 10 k $\Omega$                              |
| Accuracy LHR                              | $\pm$ 0.5 % FS (under EMC interference max.<br>$\pm$ 1.5 % FS) |
| <b>Temperature behaviour</b>              |  |
| Medium temperature                        | -40...+125 °C  |

### Wiring diagram

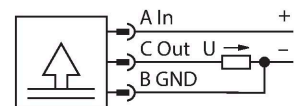



### Functional principle

The pressure sensors in the PT...-2100 product series are designed specifically for demanding mobile hydraulic applications. They operate with a fully welded metal measuring cell in different pressure ranges of up to 0...600 bar in 2- or 3-wire technology. Depending on the sensor variant, the processed signal is available as an analog output (4...20 mA, 0...10 V, 0...5 V, ratiometric). A wide range of process connections and electrical connections offer a high degree of flexibility in many different applications.

## Technical data

|   |  |
|---|--|
| Temperature coefficient                         | ± 0.2 % of full scale/10 K   |
| <b>Environmental conditions</b>                 |  |
| Ambient temperature                             | -40...+100 °C  |
| Storage temperature                             | -50...+100 °C  |
| Vibration resistance                            | Test VI (12 g, sinusoidal 18 g random vibration)   |
| Shock resistance                                | 50 g, 11 ms, half sine curve, 1000x/axis acc. to ISO 16750-3   |
| EMV   | Interference Immunity/Interference Emission<br>EN 61326-2-3 - Pressure transducer<br>ISO 13766 - Earthmoving machinery<br>DIN EN 13309 - Construction machinery<br>DIN ISO 14982 - Forestry and agriculture<br>CISPR11<br>Immunity Motor Vehicle Directive<br>ISO 11452-2, HF (Field), 100 V/m (200... 2000 MHz)<br>ISO 11452-4, HF (BCI), 100 mA (20... 400 MHz)<br>ISO 10605, ESD, ±15 kV contact, ±15 kV air<br>ISO 7637-2 3), pulses 1, 2a, 2b, 3a, 3b (test level 4)<br>ISO 16750-2, load dump, 155 V (1 Ω, 300 ms)<br>Motor vehicle directive ECE R10<br>Motor vehicle directive 2004/104/EC |
| <b>Mechanical data</b>                          |  |
| Housing material                                | Stainless-steel/Plastic, 1.4404 (AISI 316L)/polyarylamide 50 % GF UL 94 V-0  |
| Pressure connection material                    | Stainless steel 1.4404 (AISI 316L)   |
| Pressure transducer material                    | Stainless steel 1.4404 (AISI 316L)   |
| Process connection                              | 7/16"-20 UNF male thread   |
| Wrench size pressure connection / coupling nut  | 24   |
| Electrical connection                           | Connector, Deutsch DT04-3P   |
| Max. tightening torque of housing nut           | 10 Nm  |
| <b>Reference conditions acc. to IEC 61298-1</b> |  |
| Temperature                                     | 15...+25 °C  |
| Atmospheric pressure                            | 860...1060 hPa abs.  |
| Humidity  | 45 % rel.  |
| Auxiliary power                                 | 24 VDC   |
| <b>Tests/approvals</b>                          |  |
| MTTF  | 1564 years acc. to SN 29500 (Ed. 99) 40 °C   |
| Included in delivery                            | FKM O-ring special (1 pc)  |

## Accessories

| Dimension drawing   | Type             | ID        |  |
|---|------------------|-----------|--|
|  | DT06-3S-A-2/TXL  | 100000367 | Valve connector connection cable, Deutsch, DT06 female connector, straight, 3-pin, cable length: 2 m, jacket material: TPE-U (PUR), black, housing: Deutsch DT06/black |
|  | DT06-3S-A-20/TXL | 100038083 | Valve connector connection cable, Deutsch, DT06 female connector, straight, 3-pin, cable length: 2 m, jacket material: TPE-U (PUR), black, housing: Deutsch DT06/black |