


K80L4BYGR1PQ


LED Indicator – Beacon

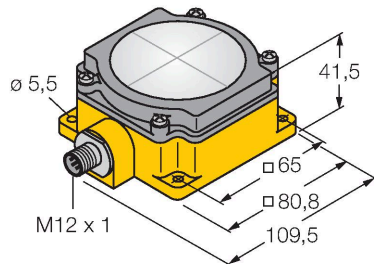

Features

- M12 x 1 connector, male, 5-pin
- Segmented display area
- Horizontally divided
- Colors: Blue (COL 1) / Yellow (COL 2) / Green (COL 3) / Red (COL 4)
- Operating voltage 18...30 VDC
- Protection class IP67

Wiring diagram

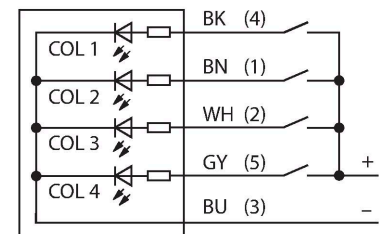

Technical data


Type	K80L4BYGR1PQ
ID	3805111
Signal and display data	
Purpose	LED indicator light
Function	Area light
Light type	Blue Yellow Green Red
Dimmable	No
Features of color 1	Blue, Permanently on
Features of color 2	Yellow
Features of color 3	Green
Features of color 4	Red
Special features	Wash down
Electrical data	
Operating voltage	18...30 VDC
Input type	PNP
Response time typical	< 10 ms
Mechanical data	
Cascadable	No
Design	Rectangular, K80L
Dimensions	109.5 x 80.9 x 41.7 mm
Housing material	Plastic, PC
Window material	Acrylic, diffuse
Electrical connection	Connector, M12 x 1, PVC
Number of cores	5
Ambient temperature	-40...+50 °C

Technical data

Relative humidity	0...95 %
Protection class	IP67
Tests/approvals	
Approvals	CE

Accessories

SMBDX80DIN	3077161
------------	---------

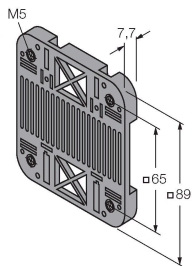

Mounting panel for DIN rail, suited for CP80, DX80, K80, Q80, operating temperature: -20...90 °C

Accessories

Dimension drawing	Type	ID	
	RKC4.5T-2/TEL	6625016	Connection cable, M12 female connector, straight, 5-pin, cable length: 2 m, jacket material: PVC, black; cULus approval
	WKC4.5T-2/TEL	6625028	Connection cable, M12 female connector, angled, 5-pin, cable length: 2 m, jacket material: PVC, black; cULus approval