


Q12AB6LVQ

Photoelectric Sensor – Retroreflective Sensor

Miniature Sensor

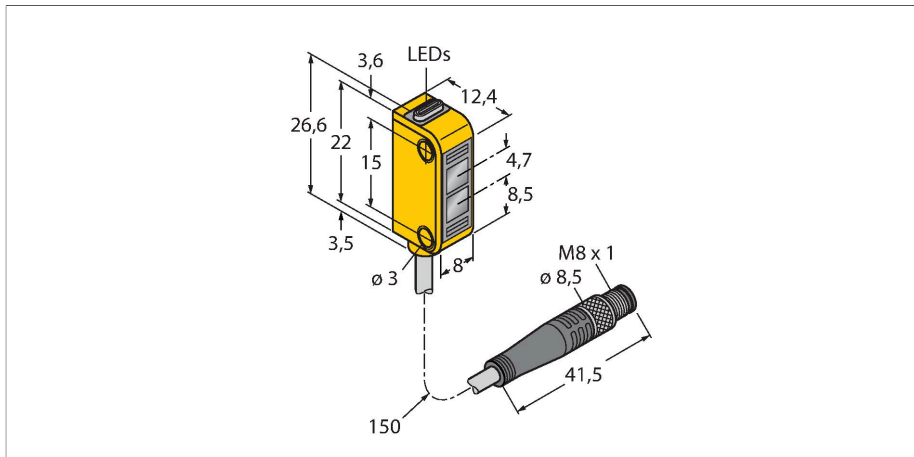


Technical data

Type	Q12AB6LVQ
ID no.	3072123
Optical data	
Function	Retroreflective Sensor
Operating mode	Unpolarized
Reflector included in delivery	no
Light type	Red
Wavelength	640 nm
Range	40...1500 mm
Electrical data	
Operating voltage	10...30 VDC
Residual ripple	< 10 % U _{ss}
DC rated operational current	≤ 50 mA
No-load current	≤ 20 mA
Short-circuit protection	yes
Reverse polarity protection	yes
Output function	NO contact, light operation, PNP/NPN
Switching frequency	≤ 700 Hz
Readiness delay	≤ 120 ms
Response time typical	< 0.7 ms
Mechanical data	
Design	Rectangular, Q12
Dimensions	12.4 x 8 x 26.6 mm
Housing material	Plastic, Thermoplastic material, Yellow
Lens	plastic, Polycarbonate

Features

- Cable, PVC, 150 mm, with M8 × 1 male end, 4-pin
- Protection class IP67
- LED all-round visible
- Indication of insufficient excess gain
- Operating voltage: 10...30 VDC
- Switching output, bipolar, light operation

Wiring diagram



Functional principle


Retro-reflective sensors incorporate emitter and receiver in a single compact housing. The light beam of the emitter is directed towards a reflector which returns the light back to the receiver. An object is detected when it interrupts this beam. Retro-reflective sensors incorporate some of the advantages of opposed mode sensors (good contrast and high excess gain). Further it is merely required to install and wire a single device. A smaller sensing range and susceptibility of devices without polarisation filter can be of

Technical data

Electrical connection	Cable with connector, M8 × 1, 0.15 m, PVC
Number of cores	4
Core cross-section	0.34 mm ²
Ambient temperature	-20...+55 °C
Protection class	IP67
Power-on indication	LED, Green
Switching state	LED, Yellow
Error indication	LED, green
Excess gain indication	LED, yellow, flashing
Tests/approvals	
MTTF	135 years acc. to SN 29500 (Ed. 99) 40 °C
Approvals	CE, cURus

disadvantage when shiny objects have to be detected.

Excess gain curve
Excess gain in relation to the distance

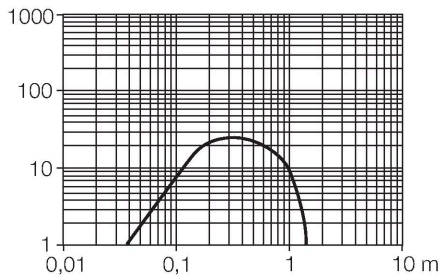

Accessories

SMBQ12A

3074341

Mounting bracket; material VA 1.4401, for photoelectric sensor, Q12 series

Technical drawing of the SMBQ12A mounting bracket. It is a vertical plate with a 20° angled top section. Dimensions include: top hole diameter 0.9, top hole offset 15, total height 29, bottom hole offset 4.8, bottom hole diameter 3.2, and a base width of 10.5. The base has three mounting holes with a diameter of 3.2 and a center-to-center distance of 16.5. A radius of 7.6 is indicated for the base transition.


SMBQ12T

3073722


Mounting bracket; material VA 1.4401, for photoelectric sensor, Q12 series

Technical drawing of the SMBQ12T mounting bracket. It is a vertical plate with a 20° angled top section. Dimensions include: top hole diameter 0.9, top hole offset 15, total height 29, bottom hole offset 4.8, bottom hole diameter 3.2, and a base width of 10.5. The base has three mounting holes with a diameter of 3.2 and a center-to-center distance of 16.5. A radius of 7.6 is indicated for the base transition. The top section has a width of 6.8 and a hole offset of 3.7.

Accessories

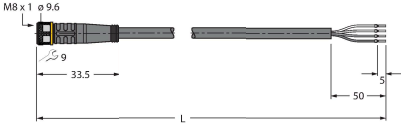Dimension drawing	Type	ID no.	
	PKW4M-2/TEL	6625067	Connection cable, female M8, angled, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com
	PKG4M-2/TEL	6625061	Connection cable, female M8, straight, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com

Accessories

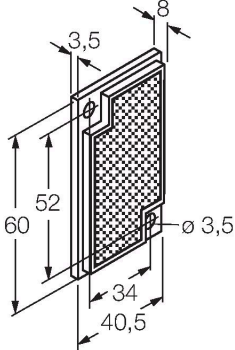Dimension drawing	Type	ID no.	
	BRT-60X40C	3044997	Rectangular reflector, reflection coefficient 1.48, material: acrylic, ambient temperature -20...+60 °C