


# WKC8T-1.5-RSC8T/TXL

## Actuator and Sensor Cable, PUR – Extension Cable

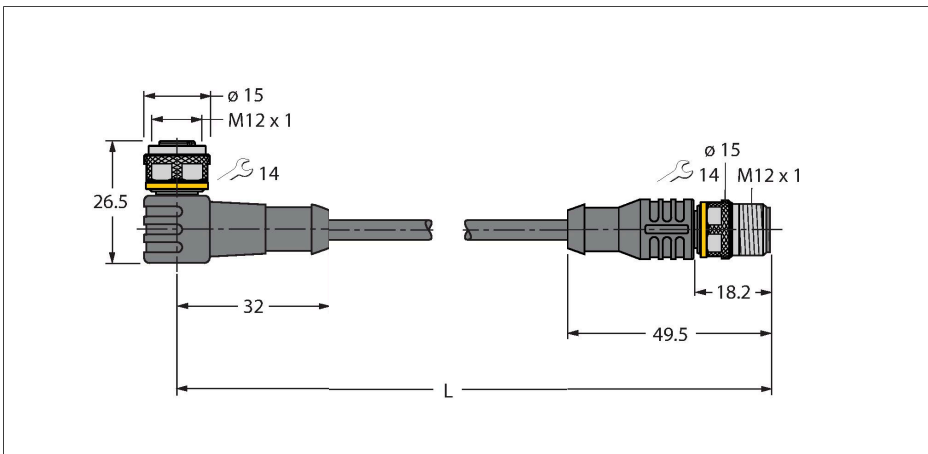

### Technical data


|                              |                                         |
|------------------------------|-----------------------------------------|
| Type                         | WKC8T-1.5-RSC8T/TXL                     |
| ID                           | 6630704                                 |
| Connector A                  | Female, M12 × 1, Angled, A-coded        |
| Number of Pins               | 8                                       |
| Contacts                     | Brass, CuZn, Gold-plated                |
| Contact carriers             | Plastic, TPU, Black                     |
| Connector body               | Plastic, TPU, Black                     |
| Coupling nut/screw           | Brass, CuZn, Nickel-plated              |
| Seal                         | Plastic, FPM/FKM                        |
| Mechanical lifespan          | > 100 Mating cycles                     |
| Pollution degree             | 3                                       |
| Protection class             | IP67, IP69K, Only in screwed condition  |
| Connector B                  | Male, M12 × 1, Straight, A-coded        |
| Number of pins               | 8                                       |
| Contacts                     | Brass, CuZn, Gold-plated                |
| Contact carriers             | Plastic, TPU, Black                     |
| Connector body               | Plastic, TPU, Black                     |
| Coupling nut/retaining screw | Brass, CuZn, Nickel-plated              |
| Mechanical life              | > 100 Mating cycles                     |
| Pollution degree             | 3                                       |
| Protection class             | IP67, IP69K, Only when screwed together |
| Cable                        |                                         |
| Cable diameter               | Ø 5.8 mm ±0.20                          |
| Cable length                 | 1.5 m                                   |
| Cable jacket                 | PUR, Black                              |
| Core insulation              | PP                                      |
| Core cross-section           | 8 x 0.25 mm²                            |

### Features



- Female M12, angled, 8-pin
- Male M12, straight, 8-pin
- Jacket material: PUR
- Jacket color: black
- Suitable for drag chain use
- Resistant to chemicals, UV radiation and oils
- Flame retardant (FT2 acc. to UL 1581, IEC 60332-2-2)
- Resistant to welding sparks
- Free from halogen, silicone, PVC and LABS
- Particularly resistant to abrasion
- Protection class: IP67, IP69K
- Cable length: 1.5 m

### Cable Cross-Section

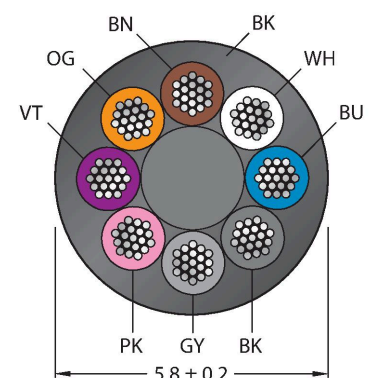

### Contact assignment

Technical data


|                                                 |                                |
|-------------------------------------------------|--------------------------------|
| Arrangement of strands                          | 32 x 0.1 mm                    |
| Core colors                                     | BN, WH, BU, BK, GY, PK, VT, OG |
| Electrical properties at +20 °C                 |                                |
| Rated voltage                                   | 30 V                           |
| Test voltage                                    | 2000 V                         |
| Current                                         | 2 A                            |
| Insulation resistance                           | > 30.5 MΩ/km                   |
| forward resistance                              | max. 79 Ω/km                   |
| Mechanical and chemical properties              |                                |
| Bending radius (stationary installation)        | ≥ 5 x Ø                        |
| Bending radius (flexible use)                   | ≥ 10 x Ø                       |
| Bending cycles                                  | ≥ 5 million                    |
| Admissible acceleration                         | max. 5 m/s²                    |
| Admissible travel path, horizontal              | 5 m (at 5 m/s²)                |
| Admissible travel path, vertical                | 2 m (at 5 m/s²)                |
| Admissible traversing speed                     | 3.3 m/s                        |
| Torsional stress                                | ± 180 °/m                      |
| Ambient temperature range (stationary)          | -50...+80 °C                   |
| Ambient temperature range (In motion)           | -25...+80 °C                   |
| Ambient temperature during drag chain operation | -25...+60 °C                   |
| Approvals                                       | cULus                          |

| Stranded Wire Colors |                 |                        |
|----------------------|-----------------|------------------------|
| Pin                  | DIN 47100 (old) | DIN EN 60947-5-2 (new) |
| 1                    | WH              | BN                     |
| 2                    | BN              | WH                     |
| 3                    | GN              | BU                     |
| 4                    | YE              | BK                     |
| 5                    | GY              | GY                     |
| 6                    | PK              | PK                     |
| 7                    | BU              | VT                     |
| 8                    | RD              | OG                     |

Accessories

|                                                                                                                       |         |
|-----------------------------------------------------------------------------------------------------------------------|---------|
| TORQUE-WRENCH-SET-AS                                                                                                  | 6936170 |
| Torque wrench set; handles with adjustable torque 0.4-1.0 Nm, torque wrench for M8 (SW9), fork wrench for M12 (SW 14) |         |

|                                                                                                                                         |         |
|-----------------------------------------------------------------------------------------------------------------------------------------|---------|
| BLANK-LABEL-FOR-CORDSETS-TEL-TXL                                                                                                        | 6936206 |
| Label for TEL and TXL cables, length: 18 mm, height: 4 mm, material: polycarbonate (PC), color: white, halogen-free and flame-retardant |         |




Functional principle

Drawing shows design status including hexagon coupling nut (Production start CW11/2016). Wiring diagram shows contact assignment acc. to DIN EN 60947-5-2 (Production start CW16/2017).

Circuit Diagram

|     |    |   |
|-----|----|---|
| 1 ) | BN | 1 |
| 2 ) | WH | 2 |
| 3 ) | BU | 3 |
| 4 ) | BK | 4 |
| 5 ) | GY | 5 |
| 6 ) | PK | 6 |
| 7 ) | VT | 7 |
| 8 ) | OG | 8 |

Accessories

| Dimension drawing                                                                 | Type                  | ID        |                                                                                                                                                                            |
|-----------------------------------------------------------------------------------|-----------------------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | LABEL-HOLDER-FLEX-PVC | 100048170 | PVC label holder for identification of extension cables (TEL/TXL product series); for cable diameters: min. 5 mm; dimensions 4 × 18 mm; delivery unit: 50 pcs. per package |