


# K50CABT2XGHQ

## Pick-to-Light – Placement Sensor

### Capacitive Sensor




#### Technical data

Type	K50CABT2XGHQ
ID	3803847
Signal and display data	
Purpose	Pick-to-Light
Function	Touch Button
Light type	Green
LED service life (L70)	50000 h
Switch Function	Momentary
Features of color 1	Green
Features of color 2	Green, 29 lm
Special features	I/O module-compatible Wash down
Electrical data	
Operating voltage	12...30 VDC
DC rated operational current	≤ 150 mA
Max. current consumption per color	75 mA
Output function	NO contact, PNP/NPN
Input type	PNP
Response time typical	< 50 ms
Mechanical data	
Design	Puck, K50C
Dimensions	Ø 50 x 48 mm
Housing material	Plastic, PC, Black
Window material	Polycarbonate, diffuse
Electrical connection	Connector, M12 × 1, PVC
Number of cores	5

#### Features

- Protection class IP67/IP69K
- M12 × 1 male connector, 5-pin
- Disabled: No color
- Enabled: Green (COL 2)
- Operating voltage 10...30 VDC
- Bipolar circuit
- NO contact
- Capacitive sensor of the second generation
- High immunity to false actuation by splashing, detergents, oils and other contaminants

#### Wiring diagram






#### Functional principle

The K50 pick-and-place sensor is suitable for many mounting and component placement applications. The LED light is reflected perfectly by the entire dome. The device has two display colors depending on the version: Color 1 shows the disabled state, color 2 the enabled state. Since the device has no inputs, a color change is effected exclusively by touching the sensor (enable). Devices with a hold function keep the enabled state, even when the contact ends.

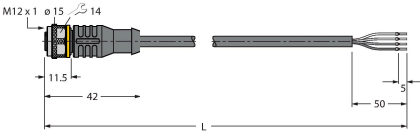
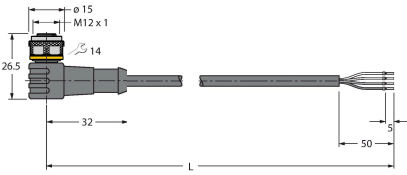
Technical data

Ambient temperature	-40...+50 °C
Relative humidity	0...90 %
Protection class	IP67 IP69
Tests/approvals	
MTTF	146 years acc. to SN 29500 (Ed. 99) 40 °C
Approvals	CE, cULus listed

Accessories

SMB30A	3032723	Mounting bracket, rectangular, stainless steel, for sensors with 30mm thread	SMB30SC	3052521	Mounting bracket, PBT black, for sensors with 30 mm thread, rotatable
					
SMB30FA	3074005	Montagewinkel; Werkstoff VA 1.4401			

Accessories

Dimension drawing	Type	ID	
	RKC4.4T-2/TEL	6625013	Connection cable, M12 female connector, straight, 4-pin, cable length: 2 m, jacket material: PVC, black; cULus approval
	WKC4.4T-2/TEL	6625025	Connection cable, M12 female connector, angled, 4-pin, cable length: 2 m, jacket material: PVC, black; cULus approval