


REM-101S6C-9F32B-H1151

Absolute Rotary Encoder - Multiturn Industrial Line

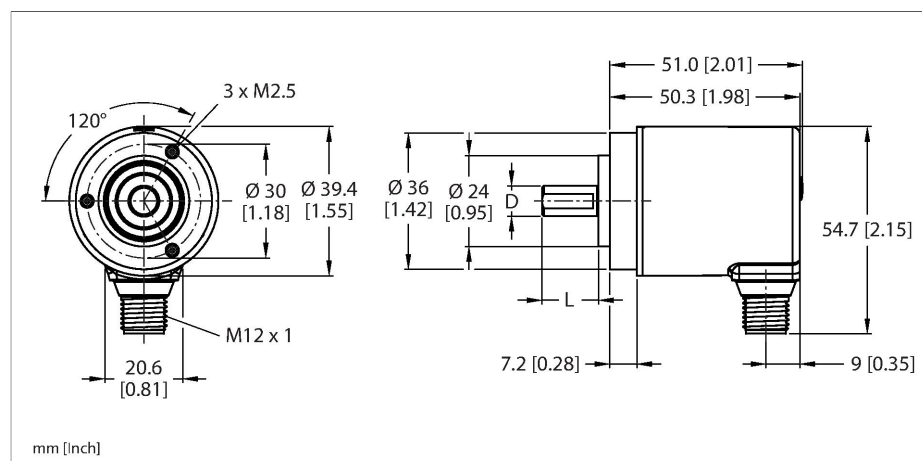



Technical data

Type	REM-101S6C-9F32B-H1151
ID	100023540
Measuring principle	Magnetic
General data	
Max. Rotational Speed	4000 rpm
Starting torque	< 0.01 Nm
Repetition accuracy	± 0.2 ° At 25 °C
Absolute accuracy	± 1 ° At 25 °C
Output type	Absolute multiturn
Electrical data	
Operating voltage	10...30 VDC
No-load current	80 mA
Short-circuit protection	yes
Wire breakage/Reverse polarity protection	yes
Communication protocol	SAE J1939
Interface	SAE J1939
Mechanical data	
Design	Solid shaft
Flange type	Clamping flange
Flange diameter	Ø 36 mm
Shaft Type	Solid shaft
Shaft diameter D [mm]	6
Shaft Length L [mm]	12.5
Shaft material	Stainless steel
Housing material	Die-cast zinc

Features

- Clamping flange, Ø 36 mm
- Solid shaft, Ø 6 mm × 12.5 mm
- Magnetic measuring principle
- Shaft material: stainless steel
- Protection class IP67 on housing and shaft side
- -40...+80 °C
- Max. 4000 rpm (continuous operation 2000 rpm)
- 10...30 VDC
- SAE J1939
- M12 × 1 male connector, 5-pin
- Singleturn resolution 14 bit scalable, default 14 bit
- Multiturn resolution scalable up to 29 bit over total resolution, default 18 bit
- Total resolution 32 bit scalable, default: 32 bit

Wiring diagram




Technical data

Electrical connection	Connector, M12 × 1
Axial shaft load	20 N
Radial shaft load	40 N
Environmental conditions	
Ambient temperature	-40...+80 °C
Vibration resistance (EN 60068-2-6)	300 m/s², 10...2000 Hz
Shock resistance (EN 60068-2-27)	2500 m/s², 6 ms
Protection class	IP67
Protection class shaft	IP67

Accessories


RCS-19-10-061545358

Bellows coupling, outer diameter:
19 mm, bore diameter: 10 mm/6 mm




RCS-15-08-061545361

Bellows coupling, outer diameter:
15 mm, bore diameter: 8 mm/6 mm




RCS-15-06-061545362

Bellows coupling, outer diameter:
15 mm, bore diameter: 6 mm/6 mm



RCS-19-06-061545360








Bellows coupling, outer diameter:
19 mm, bore diameter: 6 mm/6 mm



Accessories

Dimension drawing	Type	ID	
	RKC5701-5M	6931034	Bus cable for CAN (DeviceNet, -CANopen), M12 female connector, straight, cable length: 5 m, jacket material: PUR, anthracite; cULus approval

Accessories

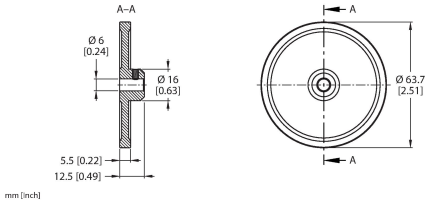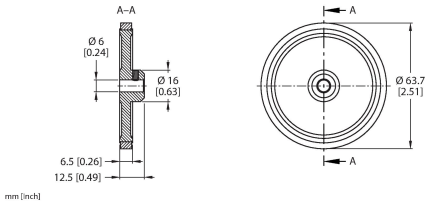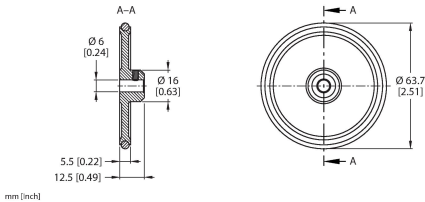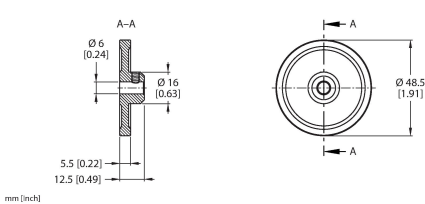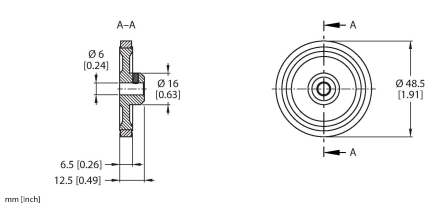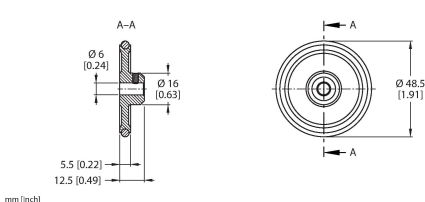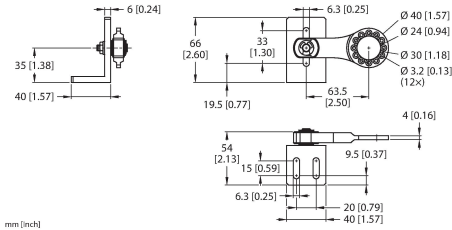Dimension drawing	Type	ID	
	RA-MW-200-5.5-DK1-6	100038295	Aluminum measuring wheel (cross knurled) for encoders; circumference 0.2 m, width 5.5 mm, D = 6 mm
	RA-MW-200-6.5-PS1-6	100038296	Aluminum measuring wheel (smooth PU) for encoders; circumference 0.2 m, width 6.5 mm, D = 6 mm
	RA-MW-200-5.5-OR1-6	100038298	Aluminum measuring wheel (O-ring) for encoders; circumference 0.2 m, width 5.5 mm, D = 6 mm
	RA-MW-B0-5.5-DK1-6	100038299	Aluminum measuring wheel (cross knurled) for encoders; circumference 6", width 5.5 mm, D = 6 mm
	RA-MW-B0-6.5-PS1-6	100038300	Aluminum measuring wheel (smooth PU) for encoders; circumference 6", width 6.5 mm, D = 6 mm
	RA-MW-B0-5.5-OR1-6	100038301	Aluminum measuring wheel (O-ring) for encoders; circumference 6", width 5.5 mm, D = 6 mm
	RA-SAB-5-24	100038293	Spring arm for small absolute encoders with a 36-mm flange; recommended contact pressure 5 N; maximum contact pressure 20 N