


QS30VR3FF600QPM16

Photoelectric Sensor – Diffuse Mode Sensor with Fixed-Field Background Suppression

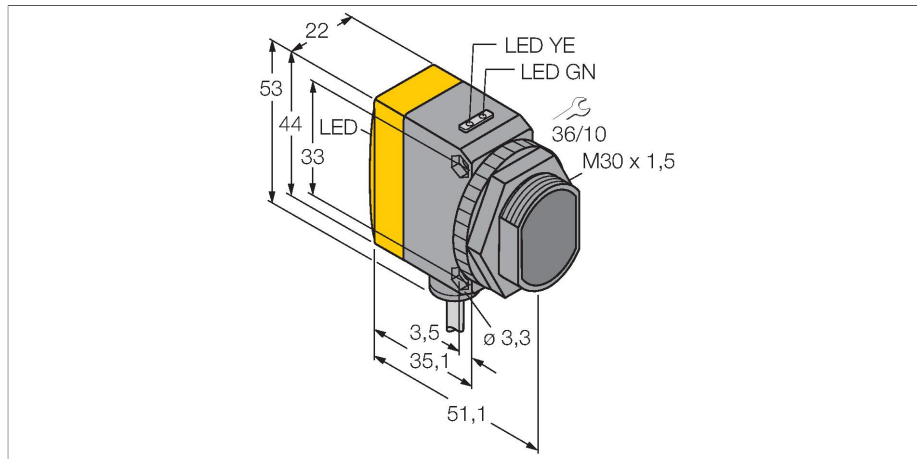

Technical data


Type	QS30VR3FF600QPM16
ID no.	3073077
Optical data	
Function	Proximity switch
Operating mode	Background suppression, non-adjustable
Light type	Red
Wavelength	680 nm
Range	0...600 mm
Electrical data	
Operating voltage	12...250 VDC
Operating voltage	24...250 VAC
No-load current	≤ 35 mA
Output function	NO/NC, Relay output
Switching frequency	≤ 250 Hz
Readiness delay	≤ 100 ms
Response time typical	< 15 ms
Mechanical data	
Design	Rectangular with thread, QS30
Dimensions	Ø 30 x 51.5 x 22 x 44 mm
Housing material	Plastic, Thermoplastic material, Yellow
Lens	plastic, Acrylic
Electrical connection	Cable with connector, 1/2", 0.15 m, PUR
Number of cores	5
Ambient temperature	-20...+70 °C
Protection class	IP67
Power-on indication	LED, Green



Features

- Cable with male end M12 × 1, 5-pin, PUR, 150 mm
- Protection class IP67
- LED all-round visible
- Operating voltage: 12...250 VDC or 24...250 VAC
- Relay output, changeover

Wiring diagram




Functional principle

Diffuse mode sensors with background suppression operate with a single emitter and several receiver elements. The target position and the photoelectric structure of the sensor determine which of the receiving elements receives the most light. The sensor electronics determine whether the reflecting object is within or outside the measuring range. These sensors come with a fixed cut-off point.

Excess gain curve
Excess gain in relation to the distance

Technical data


Switching state	LED, Yellow
Excess gain indication	LED, yellow, flashing
Tests/approvals	
MTTF	177 years acc. to SN 29500 (Ed. 99) 40 °C
Approvals	CE

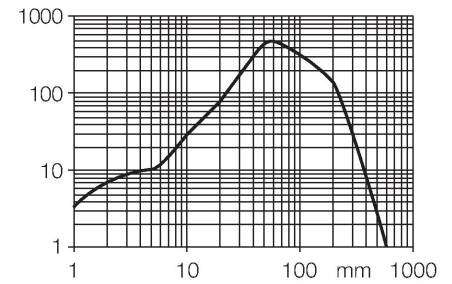

Accessories

SMBQS30Y


3002811



Protective housing, stainless steel, for
QS30 series

SMBQS30YL


3072741



Protective housing with safety glass panel, stainless steel, for QS30 series

SMB30A


3032723



Mounting bracket, rectangular,
stainless steel, for sensors with 30mm
thread

SMBQS30L


3002809



Mounting bracket, stainless steel, for
QS30 series

SMB30MM


3027162



Mounting bracket, rectangular, stainless steel, for sensors with 30 mm thread, wide holes for accurate alignment

SMB30SC

3052521



Mounting bracket, PBT black, for
sensors with 30 mm thread, rotatable