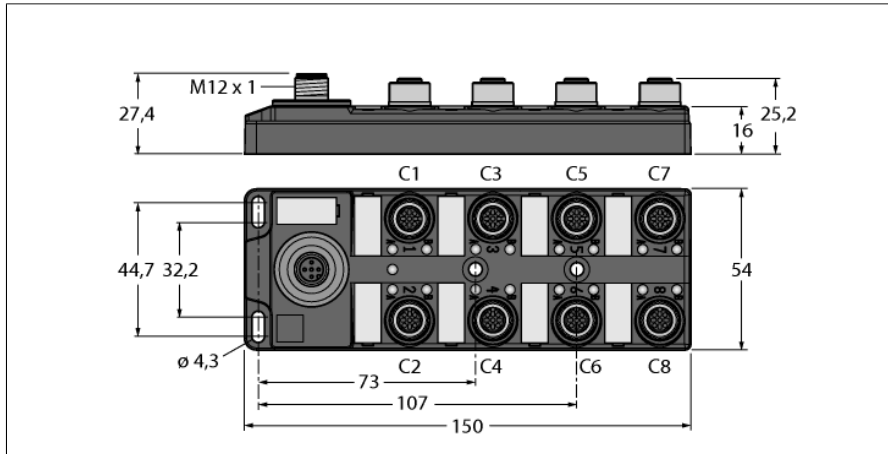


I/O Hub for Connecting Digital Signals to IO-Link Master

8 Digital PNP Outputs 0.5 A

TBIL-M1-8DOP

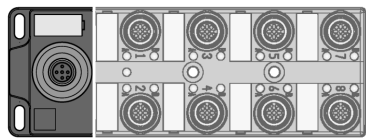

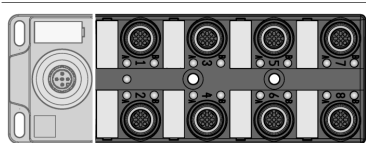



Type	TBIL-M1-8DOP
ID	6814101
Supply	
Supply voltage	24 VDC
Admissible range	18...30 VDC
	V1 max. 4 A
Operating current	Max. 65 mA
Sensor/actuator supply	Class-A supply from V1
	Short circuit-proof, 120 mA per slot
Power dissipation, typical	≤ 1.5 W
Digital outputs	
Number of channels	8 digital PNP outputs
Connectivity outputs	M12
Output type	PNP
Type of output diagnostics	Group diagnostics
Output voltage	24 VDC from supply voltage
Output current per channel	4 A total (3 A UL rating), 0.5 A per channel
Simultaneity factor	0.75
Load type	resistive, inductive, lamp load
Short-circuit protection	yes
Electrical isolation	outputs to FE 500 VDC
IO-Link	
Connectivity IO-Link	1 × M12
IO-Link specification	V 1.1
IO-Link port type	Class A
Frame type	2.3
Transmission rate	COM 2 / 38.4 kbps
Programming	FDT/DTM, TBEN IOL master
Transmission physics	corresponds to 3-wire physics (PHY2)

- IO-Link V1.1 Class A
- Glass fiber reinforced housing
- Shock and vibration tested
- Fully potted module electronics
- Protection classes IP65, IP67, IP69K
- 1 digital output per slot
- I&M data sets support installation and maintenance
- IO-Link diagnostics for short circuit and supply voltage

Standard/Directive conformity	
Vibration test	Acc. to EN 60068-2-6 Acceleration up to 20 g
Shock test	Acc. to EN 60068-2-27
Drop and topple	Acc. to IEC 60068-2-31/IEC 60068-2-32
Electromagnetic compatibility	Acc. to EN 61000-6-2/-6-4
Approvals and certificates	CE UV-resistant acc. to DIN EN ISO 4892-2A (2013)
UL Certificate	cULus LISTED 21 W2, Encl.type 1 IND.CONT.EQ.
General Information	
Dimensions (W x L x H)	54 x 150 x 27.4 mm
Ambient temperature	-40...+70 °C
Storage temperature	-40...+85 °C
Altitude	Max. 5000 m
Protection class	IP67 IP69K
MTTF	174 years acc. to SN 29500 (Ed. 99) 20 °C
Housing material	PA6-GF30
Mounting	4 mounting holes Ø 4.3 mm

Pin configuration and wiring diagrams

	Note Suitable IO-Link cables (Excerpt): 2 m: RKC4T-2-RSC4T/TXL (Ident. no. 6625604) 5m: RKC4T-5-RSC4T/TXL (Ident. no. 6625730) Further lengths and variants in the product catalog or on request Suitable IO-Link masters (Excerpt): BL20-E-4IOL (ID number 6827385) BL67-4IOL (ID number 6827386) TBEN-S2-4IOL (ID number 6814024) Further types in the product catalog or on request	M12 x 1 IO-Link  1 = 24 VDC 2 = n.c. 3 = GND 4 = C/Q (IO-Link) 5 = FE
	Note Suitable actuator supply cables (example): 2 m: RSC4.4T-2/TXL ID number (6625527) 5 m: RSC4.4T-5/TXL ID number (6625528) Further lengths and variants in the product catalog or on request	M12 x 1 Output  5 PE 4 BK - 1 BN + 2 n.c. 3 BU - — C1...C8

Module LED status

LED	Color	Status	Description
IO-Link	Green	OFF	Power off
		Flashing	IO-Link communication OK, receiving valid output process data
	Red	ON	IO-Link communication or module error
		Flashing	IO-Link communication OK, receiving no or invalid output process data or diagnosis available

Outputs LED status

LED	Color	Status	Description
C1 A / B ... C8 A / B	Green	OFF	Output inactive, logic 0
		ON	Output active, logic 1

C ... = slot number, A / B = Signal LED (signal A = pin 4, B = signal pin 2)

Process Data

	Byte	Bit 7 MSB	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0 LSB
Outputs	0	DI8 C8P4 (A)	DI7 C7P4 (A)	DI6 C6P4 (A)	DI5 C5P4 (A)	DI4 C4P4 (A)	DI3 C3P4 (A)	DI2 C2P4 (A)	DI1 C1P4 (A)

C... = slot no., P... = pin no.

Diagnostics / Events

Class/Qualifier				Code	Description
Mode	Type	Instance			
0xC0	0x30	0x04	0xF4 appears	0x5110	Supply voltage too high
0x80	0x30	0x04	0xB4 disappears	0x5110	
0xC0	0x30	0x04	0xF4 appears	0x5111	Supply voltage too low
0x80	0x30	0x04	0xB4 disappears	0x5111	
0xC0	0x30	0x04	0xF4 appears	0x7710	Short circuit to GND or Power Supply
0x80	0x30	0x04	0xB4 disappears	0x7710	
0xC0	0x30	0x04	0xF4 appears	0x5000	Hardware error
0x80	0x30	0x04	0xB4 disappears	0x5000	

Device Parameters

ISDU		Parameter Name	Access R: Read W: Write	Data Length	Data Type	
Index	Sub-Index					
0x0C	0x02	Data Storage Lock	R/W	1Bit	Boolean	Lock Parameter Upload 0: Unlocked; 1: Locked Default: 0
0x10	0x00	Vendor Name	R	16 Bytes	String	TURCK
0x11	0x00	Vendor Text	R	32 Bytes	String	www.turck.com
0x12	0x00	Product Name	R	32 Bytes	String	TBIL-M1-8DOP
0x13	0x00	Product ID	R	16 Bytes	String	6814101
0x14	0x00	Product Text	R	32 Bytes	String	I/O HUB
0x15	0x00	Serial Number	R	16 Bytes	String	
0x17	0x00	FW Revision	R	16 Bytes	String	
0x18	0x00	Application Specific Tag	R/W	32 Bytes	String	Free text e.g for application name Default: ***
0x40	0x00	Parameter ID	R/W	4 Bytes	Unsigned 32	ID no. e.g. for module identification Default: 0x0000