


# PKW3M-2/TEY

## Actuator and Sensor Cable, PVC – Connection Cable

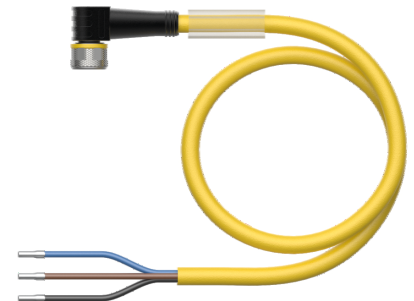

### Technical data


|                                 |                                                              |
|---------------------------------|--------------------------------------------------------------|
| Type                            | PKW3M-2/TEY                                                  |
| ID                              | 6628998                                                      |
| Connector A                     | Female, M8 x 1, Angled                                       |
| Number of Pins                  | 3                                                            |
| Contacts                        | Brass, CuZn, Gold-plated                                     |
| Contact carriers                | Plastic, TPU, Black                                          |
| Connector body                  | Plastic, TPU, Black                                          |
| Coupling nut/screw              | Brass, CuZn, Nickel-plated                                   |
| Seal                            | Plastic, FPM/FKM                                             |
| Tightening torque (range)       | 0.5 ... 0.6 Nm<br>(observe max. torque of mating connector!) |
| Mechanical lifespan             | > 100 Mating cycles                                          |
| Pollution degree                | 3                                                            |
| Protection class                | IP67, IP69K, Only in screwed condition                       |
| Cable                           |                                                              |
| Cable diameter                  | Ø 4.3 mm ±0.20                                               |
| Cable length                    | 2 m                                                          |
| Cable jacket                    | PVC, Yellow                                                  |
| Core insulation                 | PVC                                                          |
| Core cross-section              | 3 x 0.34 mm²                                                 |
| Arrangement of strands          | 42 x 0.1 mm                                                  |
| Core colors                     | BN, BU, BK                                                   |
| Electrical properties at +20 °C |                                                              |
| Rated voltage                   | 50 V <sub>AC</sub> /60 V <sub>DC</sub>                       |
| Test voltage                    | 2000 V                                                       |
| Current                         | 4 A                                                          |
| Insulation resistance           | > 30.5 MΩ/km                                                 |

### Features



- Female M8, angled, 3-pin
- Jacket material: PVC
- Jacket color: yellow
- Resistant to chemicals and oils
- Flame retardant
- Resistant to acids and alkaline solutions
- Resistant to microbes and hydrolysis
- LABS free
- Protection class: IP67, IP69K
- Cable length: 2.0 m

### Cable Cross-Section

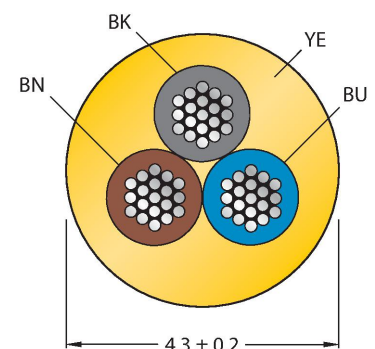

### Contact assignment



Technical data

|                                          |               |
|------------------------------------------|---------------|
| forward resistance                       | max. 57 Ω/km  |
| Mechanical and chemical properties       |               |
| Bending radius (stationary installation) | ≥ 5 x Ø       |
| Bending radius (flexible use)            | ≥ 10 x Ø      |
| Ambient temperature range (stationary)   | -40...+105 °C |
| Ambient temperature range (In motion)    | 0...+80 °C    |
| Approvals                                | cULus         |

Circuit Diagram



Accessories

TORQUE-WRENCH-SET-AS6936170

Torque wrench set; handles with adjustable torque 0.4-1.0 Nm, torque wrench for M8 (SW9), fork wrench for M12 (SW 14)

BLANK-LABEL-FOR-CORDSETS-TEL-TXL6936206

Label for TEL and TXL cables, length: 18 mm, height: 4 mm, material: polycarbonate (PC), color: white, halogen-free and flame-retardant




HAS5131-06905402

Field-wireable male connector, M8 × 1, straight, 3-pin, insulation piercing connection, cable feedthrough 2.5 to 5.1 mm, core cross-section/terminal capacity 0.14 to 0.34 mm², plastic housing, metal nut




BS5133-06901012

Konfektionierbarer Stecker, M8 x 1, gerade, 3-polig, Schraubklemmanschluss, Leitungsdurchlass 3.5 bis 5.0 mm, Adernquerschnitt/ Klemmvermögen 0.14 bis 0.50 mm², Kunststoffgehäuse, Metallüberwurfschraube




HS5131-06902710

Field-wireable male connector, M8 × 1, straight, 3-pin, pressfit technology, cable feedthrough 4.0 to 5.0 mm, core cross-section/terminal capacity 0.14 to 0.34 mm², plastic housing, metal nut




HS5231-06902810

Field-wireable male connector, M8 × 1, angled, 3-pin, pressfit technology, cable feedthrough 4.0 to 5.0 mm, core cross-section/terminal capacity 0.14 to 0.34 mm², plastic housing, metal nut



FW-PRKPM0320-SA-S-0406100002292

Field-wireable female connector, M8 × 1, straight, 3-pin, screw terminal connection, cable feedthrough 4.0 to 5.5 mm, core cross-section/terminal capacity 0.14 to 0.5 mm², plastic housing, metal coupling nut



Accessories

| Dimension drawing                                                                 | Type                  | ID        |                                                                                                                                                                            |
|-----------------------------------------------------------------------------------|-----------------------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | LABEL-HOLDER-FLEX-PVC | 100048170 | PVC label holder for identification of extension cables (TEL/TXL product series); for cable diameters: min. 5 mm; dimensions 4 × 18 mm; delivery unit: 50 pcs. per package |