

# T8AP6D100Q

## Photoelectric Sensor – Diffuse Mode Sensor

### Miniature Sensor




#### Technical data

|                              |   |
|------------------------------|---|
| Type                         | T8AP6D100Q                                |
| ID no.                       | 3068689                                   |
| <b>Optical data</b>          |   |
| Function                     | Proximity switch                          |
| Operating mode               | Diffuse                                   |
| Light type                   | Red                                       |
| Wavelength                   | 680 nm                                    |
| Range                        | 0...100 mm                                |
| <b>Electrical data</b>       |   |
| Operating voltage            | 10...30 VDC                               |
| Residual ripple              | < 10 % U <sub>ss</sub>                    |
| DC rated operational current | ≤ 50 mA                                   |
| No-load current              | ≤ 25 mA                                   |
| Short-circuit protection     | yes                                       |
| Reverse polarity protection  | yes                                       |
| Output function              | NO contact, light operation, PNP          |
| Switching frequency          | ≤ 500 Hz                                  |
| Readiness delay              | ≤ 150 ms                                  |
| Response time typical        | < 1 ms                                    |
| <b>Mechanical data</b>       |   |
| Design                       | Rectangular with thread, T8               |
| Dimensions                   | Ø 8 x 15.8 mm                             |
| Housing material             | Plastic, Thermoplastic material, Black    |
| Lens                         | plastic, Acrylic                          |
| Electrical connection        | Cable with connector, M8 × 1, 0.15 m, PVC |

#### Features

- Cable with male end, PVC, M8 × 1, 150 mm
- Protection class IP67
- Ambient temperature: -20...+55 °C
- Ideal for confined spaces
- Operating voltage: 10...30 VDC
- PNP switching output, light operation

#### Wiring diagram




#### Functional principle

Identical to retro-reflective sensors, emitter and receiver circuitry are incorporated in the same housing of the diffuse mode sensors. However, diffuse mode sensors do not detect the interruption of the light beam but the reflection of the target. A target is detected if it reflects a sufficient amount of light back to the receiver. The switching distance of diffuse mode sensors thus largely depends on the reflectivity of the target. This type of sensor is especially suited for detection of transparent objects (diffuse mode sensor with or without background suppression or convergent mode sensors).

## Technical data

|                        |                      |
|------------------------|----------------------|
| Number of cores        | 3                    |
| Core cross-section     | 0.1 mm <sup>2</sup>  |
| Ambient temperature    | -20...+55 °C         |
| Protection class       | IP67                 |
| Power-on indication    | LED, Green           |
| Switching state        | LED, Red             |
| Error indication       | LED, green, Flashing |
| Excess gain indication | LED                  |
| Alarm display          | LED red Flashing     |
| <b>Tests/approvals</b> |                      |
| Approvals              | CE                   |


Excess gain curve  
Excess gain in relation to the distance

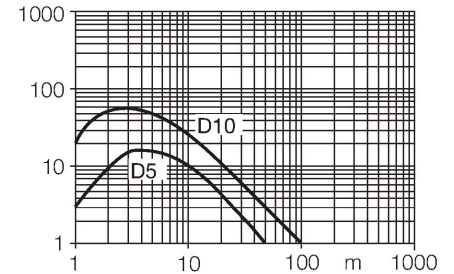

## Accessories

**SMB8MM** 3067363

Mounting bracket, material VA 1.4401, for T8 or T8L series



## Accessories

| Dimension drawing   | Type        | ID no.  |   |
|---|-------------|---------|---|
| <p>Dimension drawing of PKG3M-2/TEL cable. It shows a female M8 connector with a length of 33.5 mm and a cable length of 50 mm. The connector diameter is <math>\phi 9.6</math>.</p>        | PKG3M-2/TEL | 6625058 | Connection cable, female M8, straight, 3-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see <a href="http://www.turck.com">www.turck.com</a> |
| <p>Dimension drawing of PKW3M-2/TEL cable. It shows a female M8 angled connector with a length of 23.5 mm and a cable length of 50 mm. The connector diameter is <math>\phi 9.5</math>.</p> | PKW3M-2/TEL | 6625064 | Connection cable, female M8, angled, 3-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see <a href="http://www.turck.com">www.turck.com</a>   |