

# T8AP6D50Q

## Photoelectric Sensor – Diffuse Mode Sensor

### Miniature Sensor




#### Technical data

Type	T8AP6D50Q
ID no.	3066660
<b>Optical data</b>	
Function	Proximity switch
Operating mode	Diffuse
Light type	Red
Wavelength	680 nm
Range	0...50 mm
<b>Electrical data</b>	
Operating voltage	10...30 VDC
Residual ripple	< 10 % U <sub>ss</sub>
DC rated operational current	≤ 50 mA
No-load current	≤ 25 mA
Short-circuit protection	yes
Reverse polarity protection	yes
Output function	NO contact, light operation, PNP
Switching frequency	≤ 500 Hz
Readiness delay	≤ 150 ms
Response time typical	< 1 ms
<b>Mechanical data</b>	
Design	Rectangular with thread, T8
Dimensions	Ø 8 x 15.8 mm
Housing material	Plastic, Thermoplastic material, Black
Lens	plastic, Acrylic
Electrical connection	Cable with connector, M8 × 1, 0.15 m, PVC

#### Features

- Cable with male end, PVC, M8 × 1, 150 mm
- Protection class IP67
- Ambient temperature: -20...+55 °C
- Ideal for confined spaces
- Operating voltage: 10...30 VDC
- PNP switching output, light operation

#### Wiring diagram




#### Functional principle

Identical to retro-reflective sensors, emitter and receiver circuitry are incorporated in the same housing of the diffuse mode sensors. However, diffuse mode sensors do not detect the interruption of the light beam but the reflection of the target. A target is detected if it reflects a sufficient amount of light back to the receiver. The switching distance of diffuse mode sensors thus largely depends on the reflectivity of the target. This type of sensor is especially suited for detection of transparent objects (diffuse mode sensor with or without background suppression or convergent mode sensors).

## Technical data

Number of cores	3
Core cross-section	0.1 mm <sup>2</sup>
Ambient temperature	-20...+55 °C
Protection class	IP67
Power-on indication	LED, Green
Switching state	LED, Red
Error indication	LED, green, Flashing
Excess gain indication	LED
Alarm display	LED red Flashing
<b>Tests/approvals</b>	
Approvals	CE


Excess gain curve  
Excess gain in relation to the distance

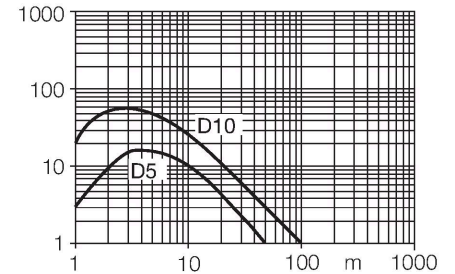

## Accessories

**SMB8MM** 3067363

Mounting bracket, material VA 1.4401, for T8 or T8L series



## Accessories

Dimension drawing	Type	ID no.	
<p>Dimension drawing of PKG3M-2/TEL cable. Dimensions: M8 x 1 <math>\phi 9.6</math>, cable length 33.5, connector length 50.</p>	PKG3M-2/TEL	6625058	Connection cable, female M8, straight, 3-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see <a href="http://www.turck.com">www.turck.com</a>
<p>Dimension drawing of PKW3M-2/TEL cable. Dimensions: M8 x 1 <math>\phi 9.5</math>, cable length 23.5, connector length 50.</p>	PKW3M-2/TEL	6625064	Connection cable, female M8, angled, 3-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see <a href="http://www.turck.com">www.turck.com</a>